TRS-80 Pocket Computer

Radio Jnack
TRS-80
MICRO
COMPUTER
SYSTEM

Catalog Number 26-3501



TABLE OF CONTENTS

A INTRODUCTION	Page
• INTRODUCTION	. 1
TABLE OF FUNCTIONS AND STATEMENTS	. 3
• KEYBOARD	. 8
• FUNCTIONS OF KEYS	. 9
SECOND FUNCTION	13
• MODE	. 13
• DISPLAY	. 14
DISPLAY SYSTEM	. 16
• INPUTTING DATA	17
• COMPUTATION RANGE	17
MANUAL CALCULATIONS	10
1. What is a manual calculation?	10
2. For arithmetic calculations	10
3. Power calculations	20
4. Calculations with parentheses	. 20
5. Scientific functions	21
6. Logic functions	24
7. Calculations using memories	25
8. Successive designation of expressions in manual calculation.	25
9. Recall function	26
10. Editing expressions	26
11. Priority of calculations	20
• PROGRAMMED CALCULATIONS	21
What is a programmed calculation?	32
2. Writing programs	31
3. Checking stored programs	36
4. Program correction	37
Executing programs	30
6. DEBUGing programs	11
7. Defined programs	12
● VARIABLES	15
1. What is a variable?	15
2. Specifying variables	46
3. Inputting to variables	48
4. Recalling the contents of variables	49
PROGRAM STATEMENTS	51
I. LE I statement	51
2. INPUT statement	52
3. PRINT statement	54
4. PAUSE statement	57
5. USING statement	57
6. GOTO statement	59
7. IF statement	60
8. GOSUB statement, RETURN statement	62

9. FOR statement, NEXT statement	64
10. STOP statement	68
11. END statement	68
12. BEEP statement	68
13. CLEAR statement	68
14. DEGREE, RADIAN, GRAD statements	
14. AREAD statement	
16. REM statement	
• COMMAND STATEMENTS	
1. RUN command	70
2. DEBUG command	
3. CONT command	
4. LIST command	
5. NEW command	
6. MEM command	73
• STATEMENTS FOR OPTIONAL CASSETTE INTERFACE (Cat. No. 26-3503)	
1. CSAVE (Cassette Save) statement	
2. CLOAD (Cassette Load) statement	
3. CLOAD? (Cassette Load?) statement	
4. CHAIN statement	
5. PRINT # (Print cross-hatch) statement	
6. INPUT # (Input cross-hatch) statement	
• RESERVABLE KEY	
1. Reserve memory for reservable keys	
2. Use of reservable keys	
3. Checking reserve programs	. 83
4. Correction of reserve programs	. 83
5. Deleting reserve programs	. 84
6. Configuration of reserve programs	. 84
• ERROR CODES	. 85
• APPENDIX	
• SPECIFICATIONS	. 88
BATTERY REPLACEMENT	. 89
CONNECTING THE CASSETTE INTERFACE	. 90
Replacing the Batteries	
Connecting the Pocket Computer to the Cassette Interface	. 91
Connecting the Cassette Interface to a Tape Recorder	
OPERATING THE CASSETTE INTERFACE AND RECORDER	
Recording onto Magnetic Tape	
Loading from a Magnetic Tape	
Editing Programs on Magnetic Tape	
CLOAD 1 statement	. 96
Checking the Program	
Execution of the Program	
SOME SAMPLE USER'S PROGRAMS	
Notes for entering program listings	
Biorhythm	. 103
Guess Number Game	
Impedance in a Series Circuit	
Days between Dates	
Random Numbers	
Normal Distribution and Percentile	
• INDEX	110

INTRODUCTION

This new TRS-80 Computer is another "first" from the company which brought you the best-selling, world renowned TRS-80. A truly pocket-sized Computer (not a programmable calculator). Of course it is an ultra-powerful calculator too . . . And it "speaks" BASIC - the most common computer language, and the easiest to learn. You'll soon be impressed by the phenomenal computing power of this hand-held TRS-80 - ideal for mathematical, scientific, engineering and business applications.

FEATURES

- Programmable, with BASIC language.
- 24-digit alphanumeric dot matrix Liquid Crystal Display, enables easy use of BASIC language, or standard calculator function.
- Program capacity 1424 steps, 26 memories with memory safe guard.
- Reservable and definable key systems. (See page 80 and 42)
- When used with an optional Cassette Interface (26-3503), you can store or recall programs and data on a cassette tape. (See page 90)

Some Special Notes

Since the Liquid Crystal Display is made of glass material, treat the Computer with care. Do not put your Pocket Computer in your back pocket - you may sit on it and break the LCD display.

To insure trouble-free operation:

- 1. The Computer should be kept in areas free from extreme temperature changes, moisture and dust.
- 2. Use a soft, dry cloth to clean the Computer. Do not use solvents or a wet cloth.
- 3. If you're not going to use the Computer for an extended period of time, remove the batteries to avoid possible damage caused by battery leakage.
- 4. If service is required, use only an authorized Radio Shack Service Center.
- 5. Keep this Manual for further reference.

Name label

Write your name on the attached name label and stick it on the back of the Computer.

For your own protection and security, we urge you to record the Serial Number of this unit in the space provided. You'll find the Serial Number on the bottom of the Computer.

Serial Number: -	
------------------	--

Where We Are Going ...

Since this is such a radically new product and most people won't know how or where to start we thought it might be helpful to tell you where we are going with the rest of this Manual.

But first — where were coming from! This manual is written assuming at least a little familiarity with BASIC. You don't have to have hands-on experience, just be familiar with simple concepts of programming and BASIC. If you are looking for a lead-'em-by-the-hand Manual, this is not it. For that approach, stop by your Radio Shack store or Computer Center and take a look at some of our books. Two or three of them start from scratch.

Back to this Manual.

First were going to give you an over-view of the Computer

Keyboard Functions Display

Then show you how to use the Computer

Manual Calculations

Programmed Calculations

And then you'll be ready for some Programming in BASIC

The back of the Manual has some vital information in the Appendices.

A separate Quick Reference Card has all the information you need for using your TRS-80 Pocket Computer, but in an extremely abbreviated form.

TABLE OF FUNCTIONS AND STATEMENTS

This Table will provide a quick reference for the BASIC Language functions as used by the Pocket Computer. The Page reference shows the page on which the Function/Statement is discussed. You can use abbreviations for the Functions and statements as noted.

1. Functions

– Rememb	er to	press	the	•	key.

Functions	Abbreviations	Remarks	Ref. page
SIN	SI	sin	
cos		cos Trigonometric functions	21
TAN	TA.	tan	
ASN	AS.	sin ⁻¹	
ACS	AC.	cos ⁻¹ Inverse trigonometric functions	21
ATN	AT.	tan ⁻¹	
LN		log _e X Natural logarithm Logarithmic	
LOG	LO.	log ₁₀ X Common logarithm	22
EXP	EX.	e ^x Exponential function (Antilogarithm for LN)	22
√	·	Extraction of square root	22
DMS	DM.	Dec al to degree/minute/second conversion	22
DEG		Degree/minute/second to decimal conversion	22
INT	:	Integer	23
ABS	AB.	Absolute value	23
SGN	SG.	Signum	23

2. Statements

State- ments	Abbrevia- tions	General forms	Remarks	Ref. page
LET (assign- ment statement)	LE.	 (1) LET [numerical variable] = (expression) (2) LET [Character variable] = "character" (3) LET [Character variable] = [Character variable] 	LET can be omitted (except when following an IF statement).	51
INPUT	I. IN. INP. INPU.	 (1) INPUT [variable], [variable], (2) INPUT "character", [variable], "character", [variable], (3) INPUT "character"; [variable], "character"; [variable], 	Input instruction Data is input.	52
PRINT	P. PR. PRI. PRIN.	(1) PRINT (expression) (2) PRINT "character" (3) PRINT [Character variable] (4) PRINT { (expression)	Output instruction. Specified contents are displayed.	54
PAUSE	PA. PAU. PAUS.	General forms are the same as those for PRINT statement.	Output instruction. Specified contents are programmed after being displayed for about 0.85 second.	57
USING	U. US. USI. USIN.	(1) USING "##,##∧" (2) (a) { PRINT PAUSE PRINT PAUSE USING; (b) { PRINT PAUSE USING; (3) USING (end of statement) [ENTER] or : (colon)	Format designation instruction. Displaying format for numerical data is designated. Format designation is cancelled.	57
GOTO	G. GO. GOT.	(1) GOTO (expression) (2) GOTO { "character" [Character variable]}	Jump instruction. Specified line or label is executed.	59
IF		 (1) IF (expression) logic operator (expression) execution statement (2) IF (expression) excution statement (3) IF ("character" } = ("character" [Character variable] execution statement (4) IF [Character variable] execute statement 	Decision instruction. Based on conditions the program branches or con- tinues execution.	60
THEN	T. TH. THE.	This statement is defined as a execution statement in an IF statement. General form is the same as that of GOTO statement.	Jump instruction. Used only with an IF statement.	61


State- ments	Abbrevia- tions	General forms	Remarks	Ref. page
GOSUB	GOS. GOSU.	(1) GOSUB (expression) (2) GOSUB ("character" [Character variable]	Subroutine jump instruction. Execution is shifted to specified line or label, where subroutine is executed.	62
RETURN	RE. RET. RETU. RETUR.	RETURN	Return instruction. Used after execution of a GOSUB (at end of subroutine) to return execution to main program.	62
FOR	F. FO.	 (1) FOR [numerical variable] = (expression 1) TO (expression 2) (2) FOR [numerical variable] = (expression 1) TO (expression 2) STEP (expression 3) (expression 1): Initial value (expression 2): End value (expression 3): Increment 	Starts FOR loop. Used in combination with NEXT statement.	64
NEXT	N. NE. NEX.	NEXT [numerical variable] This [numerical variable] must correspond to that for FOR statement.	Ends FOR loop. Used in combination with FOR statement.	64
STOP	S. ST. STO.	STOP	To stop executing program.	68
END	E. EN.	END	To indicate program end.	68
ВЕЕР	B. BE. BEE.	BEEP (expression)	Beep sound instruc- tion Beep tone is generat- ed as many times as the number of value in (expression).	68
CLEAR	CL. CLE. CLEA.	CLEAR (Possible to execute by manual operation) CLEAR ENTER	Data memory clear instruction	68
DEGREE	DEG. DEGR. DEGRE.	DEGREE (Possible to execute by manual operation) DEGREE [ENTER]	Angular mode designation. Degree (°) is designated.	69
RADIAN	RA. RAD. RADI. RADIA.	RADIAN (Possible to execute by manual operation) RADIAN EXTER	Angular mode designation. Radian ([rad]) is designated.	69



State- ments	Abbrevia- tions	General forms	Remarks	Ref. page
GRAD	GR. GRA.	GRAD (Possible to execute by manual operation) GRAD EMER	Angular mode designation. Grad ([g]) is designated.	69
AREAD (auto read)	A. AR. ARE. AREA.	AREAD [variable]	The contents displayed at start of definable program is read into the specified [variable].	69
REM (remark)		REM (note)	To designate non- execute statement in program (notes).	70
(Comman	d statement >	Possible only to execute by manual operation.		
RUN	R. RU.	(1) RUN (EMTER) (2) RUN (expression) (emter) (3) RUN ("character" (Character variable)	Program execute start instruction. Effective only in DEF and RUN modes.	70
DEBUG	D. DE. DEB. DEBU.	The general forms are defined in the same manner as those for RUN statement.	Debugging start instruction. Effective only in DEF and RUN modes.	71
CONT	C. CO. CON.	CONT ENTER	To restart an interrupted program. Effective in DEF and RUN modes.	71
LIST	L. LI. LIS.	The general forms are defined in the same manner as those for RUN statement.	For listing programs. Effective in PRO mode.	72
NEW		NEW (EMTER)	In DEF, RUN and PRO modes, program memory and data memory are completely cleared. In RESERVE mode, reserve memory is cleared.	73
MEM	M. ME.	МЕМ [витвя]	Remaining area of program memory is displayed (number of program steps and flexible memories).	7:

State- ments	Abbrevia- tions	General forms	Remarks	Ref. page
(Magnetic 1	tape control s	tatement >		
CSAVE (cassette save)	CS. CSA. CSAV.	CSAVE "file name" ছেলে (Possible only by manual operation)	Program or reserve program is recorded on magnetic tape.	74
CLOAD (cassette load)	CLO. CLOA.	CLOAD "file name" (Possible only by manual operation)	Program or reserve program is trans- ferred from magne- tic tape to the Computer.	75
CLOAD? (cassette load?)	CLO.? CLOA.?	CLOAD? "file name" [MTEN] (Possible only by manual operation)	Checks contents of program or reserve program with those placed on magnetic tape.	75
CHAIN	CH. CHA. CHAI.	(1) CHAIN "file name" (2) CHAIN "file name", (expression) (3) CHAIN "file name" { "character" [Character variable] } (To be executed by program)	Program recorded on magnetic tape is read in and then executed.	76
PRINT #	P. # PR. # PRI. # PRIN. #	 (1) PRINT # "file name" (2) PRINT # "file name"; [Label of variable] (Possible to execute both by program and manual operation) 	Data memory contents are recorded on magnetic tape.	78
INPUT #	1. # IN. # INP. # INPU. #	 (1) INPUT #"file name" (2) INPUT #"file name"; [Label of variable] (Possible to execute both by program and manual operation) 	Data recorded on magnetic tape is transferred into data memory of the Computer.	79

KEYBOARD

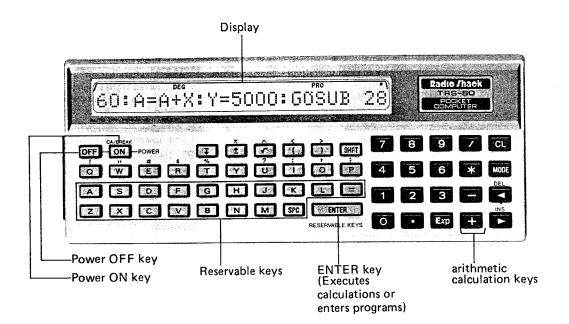

FUNCTIONS OF KEYS

Here is a brief explanation of the main keys. For details, refer to the rest of this Manual.

Key	Function
CA/BREAK ON	 Use to power-on. Breaking (temporarily interrupting) the program being executed. Clearing the Computer completely. (Reset after error condition.)
OFF	Press to power-off.
БН FT	 Secondary functions noted above the keys (such as π and Λ symbols) are activated. To obtain pi, press following sequence: SHFT 1 → π will be displayed. Display shows a SHFT at left when a shift function is pending. In "DEF" mode, press before keying in the predefined function labeled as A, S, D, etc. (Definable key designation) Example, SHFT A In "RESERVE" mode, press before activating a key used for labeling a reserve program. (Reserve key designation) Example, SHFT B In "PRO" or "RUN" mode, press before activating a key used for labeling a reserve program. (Reserve key designation) Example, SHFT B
0 ~ 9	Use to enter numbers.
	 Enters a decimal point. Use to designate abbreviations when inputting instructions. Use to designate a display format in a USING statement instruction. (See page 57.)
Exp	Use to input exponents. (This key function is displayed as E.)
A ~ Z	 These alphabetical keys serve to designate instructions. Specify variables (A to Z memory)
7	Use for division instructions.
*	Use for multiplication instructions.
+	 Use to input a positive sign for numbers. (Usually omitted.) Use for addition instructions.
-	 Use to input a negative sign for numbers. Use for subtraction instructions.
SHFT]	 Use for power calculation instructions. Use to specify the floating decimal point system (exponent display) for numerical data in USING statement instructions.
SHFT	 Use when inputting logical operators, such as <, <=, <>.

Key	Function
SHFT >	 Use when inputting logical operators, such as >, > =, <>.
=	 In assignment statements, use to assign the content (number or character) on the right for the variable specified on the left. Use when inputting logical operators, such as =, <=, >=.
(, D	Use to input parentheses.
	Use to extract square root.
SPC	 Use to provide space when inputting programs or characters. The space is ignored in programming, executing operations, etc.
SHFT :	Use to divide two or more statements in one line.
SHFT ;	 Use with PRINT statement instructions, to provide multi-display (two or more values/contents displayed at a time). Use with INPUT statement instructions, to provide pauses in comment. Use with PRINT # statement and INPUT # statement instructions to provide pause between the instruction and the variable.
SHFT 9	 Use to provide pause between two equations in continuous calculation sequences. Use with PRINT statement instructions, to provide dual display (two different values/contents are displayed at a time). Use with INPUT statement instructions, to provide pause between comments or variables. Use with CHAIN statement, to provide pause between file and expression, or between file and label when setting the opening line subsequent to execution.
SHFT #	 Use with USING statement, to provide the instruction to define the display format of numerical data. Use with PRINT # and INPUT # statements.
SHFT ?	Use with CLOAD? statement.
SHFT \$	Use when assigning character variables.
SHFT] II	 Use to designate and cancel characters. Use to specify labels.
MODE	Use to change modes (DEF, RUN, PRO, RESERVE).
CL	 Use to clear incorrect manual input. Use as an instruction to clear the display contents (such as calculation results). Use to reset after error.
	 Shifts the cursor to the right (press once to advance one position, hold down for automatic advance) Executes playback instructions. Recalls cursor (in case it is not displayed during program operation; recalls to right of colon)

Key	Function Function
•	 Shifts cursor to the left. For other functions, the same as the key.
SHFT INS	 Inserts one space (☐ appears) of 1-step capacity between the address (N) indicated by the cursor and the preceding address (N-1).
SHFT DEL	Deletes the contents of the address (N) indicated by the cursor.
ENTER	 Enters a program line into the Computer. Use when writing in programs or reserve programs (function as above). Requests manual calculation or direct execution of a COMMAND statement by the Computer. Enters a restart instruction after inputting data required by an INPUT statement or after executing a PRINT statement.

The $\boxed{1}$, $\boxed{1}$ and $\boxed{0N}$ keys have the following functions, depending on designated modes, as well as the state of the Computer.

Mode	State	1	Ī	ON
	Power off			To power-on
RUN	Program being executed			BREAKs (program is
DEF	INPUT statement being executed	To display program line being executed	To execute debugging opera-	temporarily interrupted)
	PRINT statement just now executed	or already executed, hold this key down	tion	
	Under BREAK		To execute the next line	To clear com- pletely
	Error condition during executing program	To display error- producing line, hold this key down.		
PRO (Who	en program line is not being	g displayed; e.g. such a	s when changing to F	PRO mode)
	PRINT statement just now executed	To display the interrupted line	Same as left	To clear com- pletely
	Under BREAK			
	Error has been cleared with any key other than the ON key	To display program line in which the error occurred	Same as left	

ĺ	Mode	State	<u>†</u>	Ī	ON
	PRO (When	program line is being disp	layed)		
			To display the preceeding program line	To display the next program line	To clear com- pletely
	RESERVE				

- When a letter or symbol is used in quotations (" "), it is to be considered as a character (input or displayed that way).
- When the A, S, D, F, G, H, J, K, L, =, Z, X, C, V, B, N, M, or SPC keys are pressed, following the SHFT key,
 - 1. In DEF mode, a program defined with the label of the same character begins execution.
 - 2. In RESERVE mode, a reserve program is recalled or written in.
 - 3. In PRO or RUN mode, the contents reserved by the key is recalled. If nothing is reserved, the symbol of the key is displayed.
- The OFF key does not function when the Computer is executing a calculation or program.
- If no key entry is made for about 7 minutes the power is automatically turned off (unless a program operation is pending, etc.).

Two templates are supplied with your Computer. Use them to identify the functional operation assigned to the reservable keys or defined programs assigned to the definition keys.

Example: Reserved keys (For reservable key information: refer to page 80.)

SIN	cos	TAN	ASN	ACS	ATN	LN	Log	
RUN	NEW	MEM	INPUT	PRINT	A * A	B*B		

Example: Program-defined keys (For program-key information defined see page 42.)

SIMPSON'S METHOD	AVERAGE	COORDINATE			

SECOND FUNCTION

You must use the yellow SHFT key to operate the functions printed above each key. When you press this key, SHFT will appear in the display. If you press this key in error, press it a second time and SHFT will disappear.

MODE

Your TRS-80 Pocket Computer has four modes: DEFinable, RUN, PROgram and RESERVE program. Set mode by pressing the wood key.

Definable mode (DEF):

The defined program execution mode.

Perform defined program calculations with this mode.

Run mode (RUN):

The calculation execution mode.

Perform program or manual calculations with this mode.

Program mode (PRO):

The program writing mode.

Enter programs when in this mode.

Reserve program mode (RESERVE): The reserve program writing mode.

The state of the s

Enter reserve programs when in this mode.

The MODE key changes the mode in the following sequence:


Press MODE RUN -----> PRO -----> RESERVE ------

DISPLAY



Your Pocket Computer has a 24-digit dot matrix liquid crystal display.


Display when the power is on or when the mode is changed:

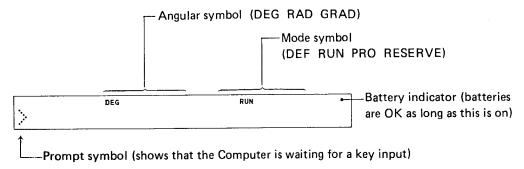


- When you turn on the power the first time after battery replacement, the prompt symbol, DEG and RUN will appear.
- When you switch it on other times, the Computer will display the prompt symbol, along with the
 angular symbol and mode symbol which was last displayed (just before power was turned off,
 either with OFF or by automatic power-off).
- When you change the Computer program mode (by pressing | MODE | key), the Computer will display the prompt symbol, then the existing angular symbol and the new mode symbol.
- To change the angular mode (for trigonometric functions), enter the name of the mode you want with the alpha keys. E.g. DEGREEE mm for DEG, RAD AND FOR ADD FOR ADD MODE.

Display when you input an "expression" etc. with the keys.

1. RUN mode:



2. RESERVE mode:



• If you input more than 24 characters, the display "rolls" over to the left to provide a space to display the new input. (A maximum of 80 characters can be entered per line. The characters which disappear to the left are not "lost", just not being displayed.)

Display of recalled information

1. RUN mode:

Cursor (If the position indicated by the cursor has a character, a block will alternately flash with the character in that position.)

2. PRO mode:

Display of calculation result


1. Normal Display

2. Scientific notation


• Calculation results are always displayed at the right.

Display of Error condition


1. Manual calculation



2. Programmed calculation



Display of Symbols

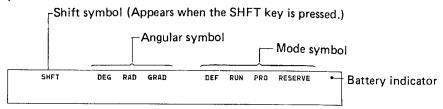

Angular symbols

DEG:

Appears when DEGree mode is set.

RAD:

Appears when RADian mode is set.

GRAD:

Appears when GRAD mode is set.

Mode symbols

DEF:

Appears when the DEFinable mode is set.

RUN:

Appears when the RUN mode is set.

PRO:

Appears when the PROgram mode is set.

RESERVE:

Appears when the RESERVE mode is set.

Battery indicator

The battery indicator is a dot located in the upper right corner of the display. When this dot dissappears, the batteries must be replaced. See page 89.

Number of input characters

When you enter numbers, characters and instructions into the Computer (via the keyboard) this data is stored in an input buffer. When you press the key, the Computer executes the instructions as required.

The input buffer can hold up to a maximum of 80 characters. When you have entered 80 characters into the input buffer (i.e. 80 characters on a "single line") the cursor will flash in the last display position. Further inputs will merely change this last position.

A manual calculation will not be correctly executed if it contains more than 80 characters (including key).

DISPLAY SYSTEM

This Computer displays a number in the normal manner or with scientific notation system. Numbers in programmed calculations are displayed according to the designated format, but in manual calculations, numbers within the following range are displayed in the normal manner, and other numbers are displayed in scientific notation.

Range of numbers displayed in the normal manner:

 Within the range shown above, if a number can not be displayed in the normal manner the display is automatically changed over to scientific notation.

Ex.
$$0.000123456 \stackrel{!}{:} 78 \rightarrow 1.2345678 \times 10^{-4}$$

A calculation result is displayed in either the normal manner or scientific notation, but it is stored in the memory in the form of

$$A \times 10^{B}$$
 $(1 \le |A| \le 9.9999999999, -99 \le B \le 99)$

INPUTTING DATA

To input a number to the Calculator, press + or - key first to input a sign, and then a numeric key or the decimal point key. (The operation of the + key can be omitted.) To input a number in the scientific notation system (A x 10^B), input the mantissa, press the + key and input the exponent.

Example:
$$-12.345 \rightarrow$$
 — 1 2 • 3 4 5 $6.7 \times 10^8 \rightarrow$ 6 • 7 Exp 8 $-9.12 \times 10^{-34} \rightarrow$ — 9 • 1 2 Exp — 3 4

To input data with a mantissa over 10 digits, the most significant 10 digits will be displayed, but internal calculations are performed using all the data input.

Example: 1234567898765 \rightarrow displayed as 1.234567898 x 10¹² 9.87654321234 \rightarrow displayed as 9.876543212 0.0000000002345678 \rightarrow displayed as 2.345678 x 10⁻¹⁰ 0.00001234567 Exp 24 \rightarrow displayed as 1.234567 x 10¹⁹

For the exponent, the last 2 entries are effective.

Example: 3 Exp 123 \rightarrow displayed as 3 x 10²³ 4 Exp = 3210 \rightarrow displayed as 4 x 10⁻¹⁰

More on inputting data when we get to programming.

COMPUTATION RANGE

The computing range is $-9.9999999999 \times 10^{99}$ to -1×10^{-99} , 0 and 1×10^{-99} to $9.9999999999 \times 10^{99}$.

Any calculation results outside of this range will result in an overflow error or 0. (See the illustration below.)

-9.999999	9999X10 ⁹⁹	-1X ₁₀ -99	0 13	X 10 ⁻⁹⁹	9.9999999	99X10 ⁹⁹	
Error	Computation range		garded is 0	Соі	mputation range	Error	+∞

MANUAL CALCULATIONS

1. What is a manual calculation?

Normally you'll program the Pocket Computer in the PRO mode and execute programs in the RUN or DEF mode. For problems that don't need programming, you can input the necessary data in the RUN (or DEF) mode and obtain immediate answers. This is called the Direct Execution mode or you might prefer to call it the manual calculation mode.

General form (Expression) Example: 5 * 4 ENTER

Input an expression and press the expression. The Computer will show the answer for the expression.

 Manual calculations given in the following examples are executed in the RUN mode. Set the Computer to the RUN mode by pressing the MODE key. (The symbol "RUN" will appear on the display.)

An Expression is composed of the following instructions:

- Constant $0 \sim 9$, •, π , Exp
- Sign +, -
- Arithmetic operator +, -, * (Multiplication), / (Division), \wedge (Power)
- Logic operator =, >, <, >=, <=, <>
- Parenthesis (,)
- Memories A ~ Z, A ()

An "Expression" can be made by combining these instructions according to a mathematical formula.

A mathematical formula is defined as an "Expression", even if it is composed only of constants or memories. (Eg. 12, π , A, etc).

2. For arithmetic calculations

Addition and subtraction

Example: 7 - 9 + 14 =-4.2 + 5 - 12.3 =

Operation	Display	Note
RUN mode		
CL 7 - 9 + 14	7-9+14_	Expression
ENTER	12.	Ans.
CL - 4.2 + 5 - 12.3	-4. 2+5-12. 3 ₋	Expression
ENTER	-11.5	Ans.

Multiplication and division

Example:

NOTE: In the BASIC language

* is used for Multiplication

/ is used for Division

IE is used for Exponent

Operation	Display		Note
CL 12 * 24 / 5 ENTER CL 27 EXP 3 * 4 / 12 ENTER	12*24/5_ 27E3*4/12_	57. 6 9000.	Expression Ans. Expression Ans.

Mixed calculation

Example:

Operation	Display	Note
CL 54 + 24.3 * 16.49	54+24. 3*16. 49_	
3.4 - 37.4	54+24. 3*16. 49/3. 4-37. 4_	
ENTER	134. 455	

Note that multiplication and division have priority over addition and subtraction (that is, multiplication and division functions are performed before addition and subtraction). To control priority of calculation functions, use parentheses as noted later on in these examples.



When utilizing a displayed result in subsequent calculations.

In each of the above examples, the CL key is pressed first. This operation is intended to clear the preceding operations or the results of calculations.

If you want to use a calculation result for continued calculations start the next calculation without pressing the CL key.

The result of (1) is incorporated into the expression (2), thus calculation 3 + 4 - 5 + 6 = is accomplished with the display of an intermediate answer.

Operation	Display	Note
CL 3 + 4 exter 5 + 6 ENTER	7. 7 75+6_ 8.	The result of (1) The result of (1), (7) is incorporated into the next calculation (2).

-After completing a calculation, if you press keys such as +, -, *, / just before inputting another (or further) expression, the preceding calculation result is incorporated as data for the next calculation.



3. Power calculations

Example:
$$4 \land 3 =$$
 $(4^3 =)$ $3 \land 3.2 \times 4 \land 2.4 =$ $(3^{3.2} \times 4^{2.4} =)$ $4 \land 3 \land 2 =$ $(4^{3'} =)$

Operation		Display	Note
CL	4 SHFT 1 3	4^3_	Expression
	ENTER	64.	Ans.
3	SHFT A 3.2 *	3^3. 2*_	Expression
	4 SHFT A 2.4	3^3. 2*4^2. 4_	
	ENTER	936. 9836103	Ans.
4 SHF	T A 3 SHFT A 2	4^3^2_	Expression
	ENTER	262144.	Ans.

Note that power calculations have priority over the four arithmetic calculations.

Also note that powers of a negative number do not compute. This is due to the calculation process used by the Pocket Computer.

4. Calculations with parentheses

Calculations can be performed by using the and keys in the same manner as you use parentheses in mathematical formulas.

Example: (72+9)/4*(21*(68/(7-3)+2))=

Operation	Display	Note
CL (72+9)/4*	(72+9) /4*_	
C21 * C68 Z C7	(72+9) /4* (21* (68/ (7_	
- 3 - + 2	+9) /4* (21* (68/ (7-3) +2)) _	
ENTER	8079. 75	Ans.

The use of parentheses results in different calculation sequences as follows. Take special care when multiplying, dividing or extracting square roots.

$$A+B/C \rightarrow A+\frac{B}{C} \qquad \sqrt{A+B} \rightarrow \sqrt{A+B}$$

$$(A+B)/C \rightarrow \frac{A+B}{C} \qquad \sqrt{(A+B)} \rightarrow \sqrt{A+B}$$

$$A/C*D \rightarrow \frac{AD}{C} \qquad \sqrt{A*B} \rightarrow B\sqrt{A}$$

$$A/(C*D) \rightarrow \frac{A}{CD} \qquad \sqrt{(A*B)} \rightarrow \sqrt{AB}$$

$$A/B/C \rightarrow \frac{A}{B} = \frac{A}{BC} \qquad A*B+C \rightarrow AB+C$$

$$A/(B/C) \rightarrow \frac{A}{B} = \frac{AC}{B} \qquad A*(B+C) \rightarrow A(B+C)$$

5. Scientific functions

Your TRS-80 Pocket Computer permits functions to be calculated just the same as in standard mathematic formulas.



 When performing a functional calculation of a constant or memory, use following form: SIN 30 or SIN A. In other cases use parentheses such as LN (A*B) or SIN $(\pi/2)$.

Angle mode

Grad mode:

The angular mode is designated by the following:

G R A D ENTER

Degree mode:

DEGREE @ ("DEG" will appear at the top of the display.)

Radian mode: R A D I A N MER ("RAD" will appear)

("GRAD" will appear)

Trigonometric functions (SIN, COS, TAN)

SIN 30= Examples:

(sin30=) Set the angular mode to "DEG".

 $COS(\pi/4) = (\cos \frac{\pi}{4} =)$ RAD mode

TAN 150= (tan 150=) GRAD mode

Operation	Display	Note
DEG (DEG RE	E ENTER)	"DEG"
CL SIN 30	SIN30_	_ _
ENTER	0.5	SIN 30°
RAD (RADIA	N EMEN)	
COS (SHFT T	COS (π _	"RAD"
7 4 🕦	COS (1 / 4) _	
ENTER	7.071067812E-01	$\cos \frac{\pi}{4}(rad)$
GRAD (GRAD ENTER)		"GRAD"
T A N 150	TAN1501.	TAN 150°
ENTER		



Example: ASN-0.5 =

 $(\sin^{-1}(-0.5)=)$

Set angular mode to DEG

ACS $(-0.5+0.1) = (\cos^{-1}(-0.5+0.1) =)$ Set angular mode to RAD

ATN(7/3) =

 $(\tan^{-1}\frac{7}{3}=)$

Set angular mode to GRAD

ASN: Arcsine ACN: Arccosine ATN: Arctangent

Operation	Operation Display	
DEG CLASN5	ASN 5_	Set DEG mode
ENTER	-30.	(°)
RADACSI5	ACS (5_	
+ .1 ¬	ACS (5+. 1) _	Set RADIAN mode
ENTER	1. 982313173	(rad)
GRAD ATNO7	ATN (7_	
/3)	ATN (7/3) _	Set GRAD mode
ENTER	74. 22378832	(*)



Logarithmic functions (LN, LOG)

Examples: LN7.4=

(ln7.4=)

Note: $\ln X = \log_e X$: Natural logarithm

LOG100=

(log100=)

 $log X = log_{10}X$: Common logarithm

Operation	Display	Note
CL LN7.4 ENTER LOG100 ENTER	LN7. 4_ 2. 00148 LOG100_ 2.	Ans.

Exponential function (EXP)

Example: $EXP-13.6 = (e^{-13.6})$ Note: EXP is anti-logarithm of LN

Operation	Display	Note
CL EXP-13.6	EXP -13. 6_	
ENTER	1.24049508E-06	Ans.

Roots

Examples: $\sqrt{73}$ = $(\sqrt{73}$ =) $(\sqrt{256}$ = $\sqrt{256}$ =) $\sqrt{(3*3+4*4)}$ = $(\sqrt{3^2+4^2}$ =)

Operation		Display		Note
CL	73 EMTER)	√73 <u></u>	8. 544003745	Ans.
	₹ 256	√√256 <u></u>		, , , , ,
	ENTER	,	4.	Ans.
	3 ± 4 ± 4 ¬	√(3*_ √(3*3+4*4)_		
	ЕМЕЯ	V (5.05) 4 : 07 =	5.	Ans.

Angle conversions (DMS, DEG)

DMS: Decimal degrees → Degrees/minutes/seconds

When converting decimal degrees to degrees/minutes/seconds, the answer is displayed as follows: integer portion = degrees; 1st and 2nd decimal digits = minutes; 3rd and 4th digits = seconds; and any remaining decimal digits are decimal degrees.

DEG: Degrees/minutes/seconds → Decimal degrees

To convert an angle given in degrees/minutes/seconds to its decimal equivalent, it must be entered as integer and decimal numbers as noted above.

Example: Convert 15.4125° to its degree/minute/second equivalent.

Convert 15°24'45" to its decimal equivalent.

	Operation	Display	Note
CL	D M S 15.4125	DMS15. 4125_	
	ENTER	15. 2445	15° 24′ 45″
	D E G 15.2445	DEG15. 2445_	
	ENTER	15. 4125	15.4125°

Integer (INT)

The integer (INT) function converts numerical values to the next <u>lowest</u> integer value: 12.34 becomes 12.; and -2.45 becomes -3.

Examples: INT (65/3) = INT (-0.3) =

Display		Note
INT (65/3) _		
	21.	
INT 3 _		
	-1.	
	INT (65/3) _	INT (65/3) _ 21. INT 3 _

Sign function (SGN)

The SGN function takes the following values for numerical values of X. (That is, it returns a -1 for all negative values, zero for 0 and a +1 for all positive values.)

- +1 if X > 0
- 0 if X = 0
- -1 if X < 0

Example: SGN (5-9) =

Operation	Display		, Note
S G N (5 - 9)	SGN (5-9) _		
ENTER		-1.	

Absolute value (ABS)

The ABS function finds the absolute value $\mid X \mid$ of a numerical value $\mid X$. (In simple terms we might say it strips the sign from a number.)

Example: ABS (5-9) = (|5-9| =)

Operation	Display		Note
ABS (5-9)	ABS (5-9) _		
ENTER		4.	

6. Logic functions

These functions return 1 when an expression composed using logic operators (=, >, <, > =, < = and <>) is true, and 0 when false. In other words, $x \circ y$ (\circ is a logic operator) gives us either a 1 or a 0 depending on the relationship of x and y.

Logic operator		
=*	1 if $x = y$. 0 if $x \neq y$.	
>	1 if $x > y$ 0 if $x \le y$	•
<	1 if $x < y$ 0 if $x \ge y$	
>=	$ \begin{array}{l} 1 \text{ if } x \ge y \\ 0 \text{ if } x < y \end{array} $	
<=	$ \begin{array}{l} 1 \text{ if } x \leq y \\ 0 \text{ if } x > y \end{array} $	
<>	1 if $x \neq y$ 0 if $x = y$	

Note: < > has the same meaning as \neq .

** If you want to use a logical expression relating to contents of a memory (variable name) you must use the following form: (expression) = [memory/variable name]. If you use [memory/variable name] = (expression) the Computer will treat the statement as a normal assignment statement; e.g. A = (expression). (Relational equations in IF statements, are not subject to this exception; i.e. they function normally.)

Examples:
$$(5+8)>(3*4)=$$

 $(24/5)<=(2.4*2)=$

Operation	Display		Note
(5 + 8) SHFT >	(5+8) > _		
(3 * 4)	(5+8) > (3*4) _		
ENTER		1.	Answer
(24 / 5) SHFT <=	(24/5) <=_		
(2.4 * 2)	(24/5) <= (2.4*2)_		
ENTER		1.	Answer

Notes:

Logical expressions (AND) and (OR) can be executed using the following form of logical computations.

Logical OR (logical computation) + (logical computation)

Example: (A < 0) + (A > 8) 1 is returned if A is smaller than 0 or larger than 8.

(B > 0) + (C > 0) 1 is returned if B or C is larger than 0 and 2 is returned if both B and C are larger than 0.

2 Logical AND (logical computation) * (logical computation)

Example: (B > 1) * (B < 6) 1 is returned if B is larger than 1 and smaller than 6.

7	Calculations	using	memories
		aung	111611101162

The TRS-80 Pocket Computer has two types of data memories: fixed memory (26 in all) and flexible memory. In this section we'll give examples of calculations using fixed memories. (For details, refer to page 45.) Specifying memories (1) The fixed memories are given labels A through Z (each being specified by the A through Z keys). Example: When memory A is loaded with 4 and memory B with 5. A + B * B - 12 ENTER → (A + B) EMTER 3. Specifying memories (2) The fixed memories A through Z can be used as dimension as specified in the form of A (This form is used for storing data in a matrix or array. Example: A (2) → Memory A (2), namely memory B, is specified. A (2 + 3) → Memory A (5), namely memory E, is specified. Input to the memories Numerical values and others are input to the memories in the following forms. General form [memory] = (expression) [mages] A = 5 * 6 emer Example: → Loading the answer of 5 * 6 (30) into memory A Y = A + B ENTER → Loading the contents of memory A plus memory B into memory Y. A (26) = 3 + 9 ENTER \rightarrow Loading the answer of 3 + 9 (12) into memory A (26) (memory Z). When the memories are loaded with new data, they are automatically cleared of their previous contents. Recalling the memory contents The memory contents are recalled using the following form. General form [memory] Example: A ENTER Recalling the contents of memory A A (18) ENTER Recalling the contents of memory A (18) (memory R)

8. Successive designation of expressions in manual calculation

In manual calculations, you can designate and solve two or more expressions in succession by separating them with a comma. However, the computer will display the result of the final execution only.

General form ENTER



Example: When $A = \frac{5}{12-4}$, $B = \frac{87}{24}$, $C = \frac{12}{7+8}$, solve A * B/C =

Operation	Display	Note
A = 5 / (12 - 4)	A=5/(12-4)_	
SHFT , B = 87 / 24 SHFT ,	A=5/(12-4), B=87/24, _	
C = 12 / (7	/(12-4), B=87/24, C=12/(7_	
+ 8) SHFT •	-4), B=87/24, C=12/(7+8), _	
A*B/C	=87/24, C=12/(7+8), A*B/C_	
ENTER	2. 83203125	

9. Recall function

This function permits you to recall (into display) a portion of your original input so you can check and/or edit it. This function is activated by pressing either the or key right after the we key in manual calculations.

Example 1: When an execution is finished without an error message:

Operation	Display	Note	
A = 19 + 54	A=19+54_		
ENTER		73.	
▶ or ◀	A=19+54		Recall
	<u> </u>		

The cursor shows up at the beginning of the display.
(The complete entry is displayed.)

Example 2: When an error occurs:

Operation	Display	Note
B = (123456 +	B= ((123456+_	
789012 🗀 🚁 427 🖊 197	(123456+789012) *427/197_	
① / 0 + 139	+789012) *427/197) /0+139_	
ENTER	1	Error message
► or ◀	3456+789012) *427/197) /0+	Recall

The cursor appears where an error is detected. (The complete entry is displayed to the location where the error has been detected.)

10. Editing expressions

Input expressions, if recalled before or immediately after their execution, can be arbitrarily edited (correction, insertion or deletion).

When you make a correction, insertion or deletion, follow the procedures given below.

Correction: Use the or we key to move the cursor to the position where the correc-

tion is to be made/stored, and enter correct key operation.

Insertion: Use the or key to move the cursor to the position where you want

to insert information, and press SHFT and INS keys.

The contents of that position and all after it will be shifted one step backward and an insertion mark (\square) will appear in the empty position.



Use the or key to move the cursor to the position you want to delete, and press the SHFT and DEL keys. The contents at that position will

be deleted and all after will be shifted one step forward.

The cursor still remains at the said position.

Example: You make a mistake in inputting the expression below; edit as follows.

A=5+6* (21/S | N 30)

Proper operation

A = 5 + 6 * (21 / S | N | 30)

(1) To correct the + key error (pressed by mistake instead of the * key).

Operation	Display	Note
A = 5 + 6 + *	A=5+6+_ A=5+6+ A=5+6*_	The + key is added instead of the * key. The cursor moves to the left. Enter the correct key.

(2) If you forget to input the S, I and N keys (Insertion of SIN)

	Operation	Display	Note
DEG	A = 5 + 6 * (21 / 30) SHET INS SHET INS S N	A=5+6*_ A=5+6* (21/30) _ A=5+6* (21/30) A=5+6* (21/30) A=5+6* (21/330) A=5+6* (21/3330) A=5+6* (21/3330)	SIN is not entered. The cursor moves to the left. Spaces are added where you want to enter SIN. SIN is inserted.
	ENTER	257.	

(3) If you have input 211 by mistake instead of 21 (Deletion of 1)

Operation	Display	Note
	_	The cursor moves left to the position where you want to make an deletion. 1 is deleted.

(4) If you have input 2 by mistake (instead of 6) and executed the calculation.

Operation	Display	Note
DEG A = 5 + 2 * (A=5+2* (_	Set DEG mode.
21 / S I N 30)	A=5+2* (21/SIN30) _	
ENTER	89.	
	A=5+2* (21/SIN 30)	Entire expression is is recalled.
EEEE	A=5+2* (21/SIN 30)	The cursor moves left.
6	A=5+6 * (21∕SIN 30)	Correction
ENTER	257.	

(5) If you have input SIN 0 by mistake (instead of SIN 30) and executed the calculation (Error display)

Operation	Display	Note
DEG A = 5 + 6 * (A=5+6* (_ A=5+6* (21/SINO)	
ENTER	1 · · · · · · · · · · · · · · · · · · ·	Error is detected. Entire expression is
SHFT INS	A=5+6* (21/SIN 30)	recalled. 3 is inserted.
3 ENTER	A=5+6* (21/SIN 30) 257.	

• Cursor positioning

() i


If you keep the or key pressed, the cursor automatically starts moving right or left after about one second. The cursor will move about 10 steps per second. The cursor stops automatic movement as soon as you release the key. When editing long lines of information, this fast advance or return is a great aid.

11. Priority of calculations

The computer performs calculations from the left to the right with some exceptions (for example, functions, multiplication or division has priority over addition or subtraction). The following lists the order of operations of the Computer.

- 1. Recalling π and fixed memories A through Z.
- 2. Recalling memories in the form of A () (Recalling dimensioned memories)
- 3. Power directly preceded by multiplication (which involves memory) 2A A 3, for example.
- 4. Multiplication where \star is omitted: 2A, π B or AB (see page 30)
- 5. Functions (SIN, COS, TAN, ASN, ACS, ATN, LN, LOG, EXP, DMS, DEG, INT, ABS, SGN, $\sqrt{}$)
- 6. Power (Λ) other than as defined in 3 above.
- 7. Sign (+, -)
- 8. Multiplication and division (*,/)
- 9. Addition and subtraction (+, -)
- 10. Logical computation (=,>,<,>=,<=,<>)
- Calculations in parenthesis will occur first. In multiple parenthesis, calculations in the innermost parentheses have priority over all the others.
- Compound founctions (LN ABS A, EXP $\sqrt{8}$) are calculated from right to left.
- A string of powers, such as 3
 4
 2, is calculated from the right to the left.

Levels of pending operation

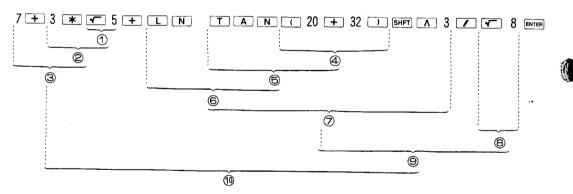

As seen from the example above, the Computer performs computations following a given mathematical formula. But this presupposes that the Computer has a place to temporarily store instructions or data (numerical values) that cannot be directly processed. Such a place is called a stack (a stack register). Your Pocket Computer has a 16-stage function stack and 8-stage data stack.

Example: Behavior of both stacks during the execution of

Where
$$A = 2.4$$
, $B = 30$, $A(25) = 3$

Angular mode = DEG

Instruc-	×	Data stack			1	Function stack					
tion	register	1st stage	2nd stage	3rd stage		1st stage	2nd stage	3rd stage	4thstage	5thstage	•••
1.2	1.2										
+	1.2	1.2				+					
A	2.4	1.2				+					
*	2.4	2.4	1.2			*	+				
(2.4	2.4	1.2			(*	+			
3.5	3.5	2.4	1.2			(*	+			
+	3.5	3.5	2.4	1.2		+	(*	+		
SIN	3.5	3.5	2.4	1.2		SIN	+	(*	+	
В	30	3.5	2.4	1.2		SIN	+	(*	+	
)	0.5	3.5	2.4	1.2		+	(*	+		
	4	2.4	1.2			*	+				
^	4	4	2.4	1.2		^	*	+			
A(4	4	2.4	1.2		Α(^	*	+		
25	25	4	2.4	1.2		Α(^	*	+		
)	3	4	2.4	1.2		^	*	+			
ENTER	64	2.4	1.2			*	+				
	153.6	1.2				+		ĺ			
	154.8							İ	j		

Note: X register is the Calculation register

As seen from the above, "A(" is placed in the function stack as one step. The Computer will handle up to 15 levels of parentheses unless the function stack capacity is exceeded.

NOTES

()

The Computer permits you to input 2 * A, $3 * \pi$ or B * A (12), for example, in the following form: 2A, 3π or BA(12) omitting the multiplication symbol * immediately in front of memory or π . Such a form of multiplication has priority over functions, but when it is directly followed by a power, the power takes precedence over it.

Example: SIN 2A
$$\rightarrow$$
 equivalent to SIN (2 * A)
 $2\pi A \land 3 \rightarrow$ equivalent to 2 * π * (A \land 3)

However, expressions put in the Computer as mentioned above (multiplication instruction * omitted) are executed just as the they were incorporated in the instruction.

Example: Behavior of the stacks during execution of 2ABC PMER

If
$$A = 3$$
, $B = 5$, $C = 7$

Instruction	X register		Data stack			Function stack		
2	2							
Α	3	2			*			
В	5	3	2		*	*		
С	7	5	3	2	*	*	*	
ENTER	35	3	2	_	*	*	7	
	105	2			*			
	210				,			

PROGRAMMED CALCULATIONS

You program your TRS-80 using a computer language called BASIC. BASIC is generally considered the easiest computer language to understand — since it uses simple English words. But of course BASIC is not limited to beginners — it is a very powerful computer language used by many experienced professional programmers. You can't "talk" (or "type") to your Computer in an every-day English conversational manner. You have to use the correct words, in the correct sequence — that is, according to certain rules.

With a Computer, you are the master, you are the boss. The Computer can only do what you tell it. But you must give the instructions in a form the Computer can understand. That's where the BASIC language comes in. Each BASIC instruction must start with a line number (normally we start with 10 and each successive line is by 10's --10, 20, 30, etc.).

Since this Manual is not intended to be a simple learner's guide to BASIC Programming, if you feel we are moving along too fast, we urge you to stop by your local Radio Shack store and obtain a copy of either (or both) of the following books:

BASIC Computer Language (60-2016) BASIC Computer Programming (60-2015)

1. What is a program calculation?

We've been discussing manual calculation for the last 8 or 10 pages —— calculations performed by manual entry of all information. Now let's find out why your TRS-80 Pocket Computer is much more than a Calculator.

With programmed calculations you enter a series of instructions to the Computer (a program). Then all you need do is enter the data for the calculation work — the Computer uses the program (stored in memory) to give you the answers. Let's give an example.

When solving problems using Pythagoras's theorem, for example, you must carry out the following operation.

Pythagora's theorem

For a rectangular triangle, its three sides a, b and c have the following relations

$$c = \sqrt{a^2 + b^2}$$

where c is the side opposite to the right angle.



Manual calculation requires the following sequence.

(when a = 3 and b = 4.)

Operation	Display		Note
Set to the RUN mode.			
A = 3 ENTER		3.	A is loaded with 3.
B = 4 ENTER		4.	B is loaded with 4.
C= (A * A	C=√(A*A_		
+ B * B)	C=√(A*A+B*B)_		
ENTER		5.	$\sqrt{A^2+B^2}$

[The above calculation of course can be accomplished by using:

 $\sqrt{(3*3+4*4)}$ Rowever, we're using the key operations shown above to aid in our application example.]

Let's key in this simple BASIC program:

[PROGRAM 1]

Program	Note
10:INPUT A,B 20:C=√(A*A+B*B) 30:PRINT C 40:END	Input instruction Operation instruction Output instruction End instruction

NOTE: The letters A, B and C are called <u>variables</u>. You might want to refer to pages 45 to 50 for a detailed description of what variables are and how they relate to programming.

To complete a program line, you must press even .

Basically, a program is complete if you have an input instruction (INPUT), output instruction (PRINT) and end instruction (END) plus the steps required to process the calculation procedures.

Input instruction:

Provides input data for memory.


Output instruction:

Provides display of calculation results (or other output).

The tables below summarize the writing and execution of Program 1.

Operation	Display	Note
[Writing]		
Set to the PRO mode.	Prompt symbol	Press MODE key to display PRO
N E W EMER	, ,	(i.e. program mode).
10 I N P U T	10 NPUT_	Clears program memory.
A SHFT , B	10 I NPUTA, B	Number and instruction is entered. (Input instruction)
ENTER	10: INPUT A,B	Line 10 is "written" into
20 C = 🕶 (A	20C=√(A_	Computer.
* A + B	20C=√(A*A+B	Number and instruction is entered. (Operation
* B)	20C=√(A*A+B*B) _	instruction)
ENTER	20:C=√(A*A+B*B)	Line 20 is written into
30 P R I N T	30PRINT_	Computer.
C	30PRINTC_	Number and instruction is enterce. (Output instruction)
ENTER	30:PRINT C	Line 30 is written into Computer.
40 E N D	40END_	Number and instruction is
ENTER	40:END	entered. (End instruction) Line 40 is written into Computer.
[Execution]		
Set to the RUN mode.		
MODE MODE MODE	>	RUN will be displayed.
RUN	RUN_	RUN tells Computer program to start execution.
ENTER	?	Execution is started; the display asks you to input a variable.
3	3_	A variable, 3, is put in.
EMER	9	The variable is written in (3 is loaded on memory A); the
4	4_	display asks you to input another variable. A variable, 4, is put in.
ENTER	5.	The variable is written in (4 is loaded on memory B); calculation result is displayed.
ENTER	>	Execution is terminated.
Pythagoras's theorem.	itting different values. Thus you can ca	lculate many problems using

Thus, once a program is written, you can execute it simply, any number of times you want.



When you "write" programs using the keyboard, set the Computer in the PRO mode.

Preparation

When writing a new program, we suggest that you clear the program memory by using a NEW command.

However, this is not true if you want to write a program in succession with the preceding one.

[Procedures]

- (1) Designate the PRO mode.
- (2) N E W ENTER

All contents of the program and data memories will be cleared with above (2) operation.

Writing in

Detailed below is how you would write the first program (PROGRAM 1).

Step	Operation	Display	Note
	Set to the PRO mode		
1	N E W ENTER	>	The program memory is cleared.
	A colon (:) does not need to be put in.		
2	10 N P U T	10 NPUT_	Write in line 10. (This line is
3	A SHFT , B	10INPUTA,B_	placed in the input buffer.)
4	EMTER	10: INPUT A B A display Space of colon	Line 10 is entered into program memory when you push EMER
5	20 C = T (A	20C=√(A_)
6	* A + B	20C=√(A*A+B_	Write in line 20. (This line is placed in the input buffer.)
7	* B)	20C=√(A*A+B*B)_	
8	ENTER	20:C=√(A*A+B*B)	Line 20 is entered into program memory.
9	30 PRINT	30PRINT_	Write in line 30. (This line is
10	C	30PRINTC_	placed in the input buffer.)
11	ENTER	30: PRINT C	Line 30 is entered into program memory.
12	40 E N D	40END_	Write in line 40. (This line is placed in the input buffer.)
13	ENTER	40:END	Line 40 is entered into program memory.

As you enter a line into the Computer you notice that a colon appears after the line number. Also the Computer adds a space after commands (PRINT, INPUT, etc.).


If any line contains more characters than the display can show at one time, only the beginning portion of the line of instructions will be displayed (up to 24 characters and spaces).

Comment

You have learned by now that the Computer's programs are made up of lines: a line is composed of a line number, label and statements.



Example: Composition of a program

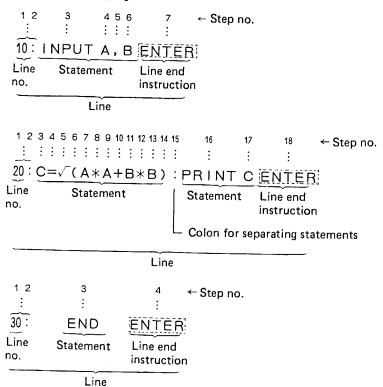

Line

- Lines must be numbered with integer numbers ranging from 1 to 999.
- Ending of a line is accomplished by inputting the key. The ENTER instruction is represented by a space in the display. (Nothing appears.)

Statement

- One line consists of one or more statements (statement instructions in the BASIC language).
- Statements are divided by colons (:).

Step

One statement consists of one or more operation instructions, each of those instructions having a capacity of one step.

Instructions such as LN, SIN and INPUT are processed as one-step information written into the program memory, even though represented in the display by two to six characters.

Label


Characters (letters, numerals, symbols) are placed between quotation marks following a line number. The label serves as the sign for a program jump, etc. See page 42.

Note: Each line number (1 through 999) is held as two-step information in the program memory. Although not present in a program memory, the colon (:) that follows every line number is automatically displayed immediately after programs have been written or when they are recalled.


Organization of Program Memory

When loaded with programs, the program memory changes as follows:

An input is placed (on a 1-character = 1-step basis) in the input buffer, when ENTER is pressed the input is written in the program memory (after being converted into the form of 1-instruction = 1-step).

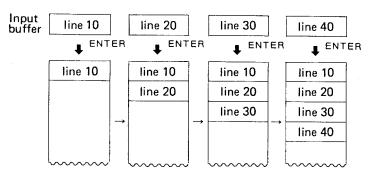

One line of a program can hold a maximum of 80 steps (1 step = 1 character)
 Lines are stored in numerical order into the program memory (even if not entered in numerical order).

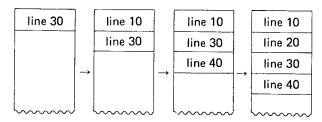

However, the real program memory does not have a separate storage area for every line as shown above, but stores programs step by step in a row; your Computer has a capacity of 1424 steps.

,	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
	Line 1	no. 0	INPUT	Α	,	В	ENTER	Lin	e no 2 0	С	=	√	(А	*	Α –
	17	18	19	20	21	22	23 ·		25	26	27	28	29	30	31	← step
└	+	В	*	В)	ENTER	Line 3	no. 0	PRINT	С	ENTER		no. 0	END	ENTER	

3. Checking stored programs

You should always check that programs are properly stored.

Whenever programs are input via the keyboard, the Computer displays them (permitting you to check each input).

After you finish writing a program, you can check it as follows:

- Select the PRO mode.
- ② Recall the line you want to check, by pressing the ① or ① key. Or recall the intended line with a LIST command. (Refer to page 72.)

3 Check instructions on the display.

If a display line is more than 24-characters long, move cursor by using and keys to display the remainder.



Example: Checking programs

Operation	Display	Note
Set to the PRO mode	>	
	10: INPUT A,B	
Ī	20:C=√(A*A+B*B)	Lines are recalled in numerical
· 🚺	30:PRINT C	order.
Ī	40:END]
1	30:PRINT C	Lines on the display are brought back to the memory.
1	20:C=√(A*A+B*B)	
1	10: INPUT A,B	

• If you press and hold the i or tkey for about one second, the display will automatically show the next line or the preceding line.

When the program memory is loaded with nothing, pressing the or key or execution of a LIST command will only display the prompt symbol (>).

4. Program correction

When you find errors in stored programs, use the following procedures for correction.

Partial correction

[Procedures]

- (1) Select the PRO mode.
- ② Display the line you want to correct by using the or key, or a LIST command.
- Move the cursor to the step you want, by pressing the or key.
- Make a correction, insertion or deletion deletion as described on page 26.
- (5) When the correction is finished, press the key. This will return the corrected program to program memory.

Example: A program identical to PROGRAM 1 is set up and corrected as follows:

10: INPUT A,B

20:C=√(A*A+B+B)

30: PAUSE C

40:END

20:C=√(A*A+B*B)

30:PRINT C

Step	Operation	Display	Note		
	Set to the PRO mode	>			
1	II	20:C=√(A*A+B+B)	Recall the line you want to modify.		
2		20 C=√(A*A+B+B)	The cursor appears on the display.		
3		20 C=√(A*A+B±B)	The cursor moves to the posi- tion where correction is to be		
4	*	20 C=√(A*A+B*B)	made. Correction		
5	ENTER	20:C=√(A*A+B*B)	Remember to press EMTER		
6	Ī	30:PAUSE C	Recall another line you want to modify.		
7	•	30 PAUSE C	The cursor appears on the display.		
8	P	30 PC)		
9	R	30 PR_	Correction		
10	INTC	30 PRINTC_			
11	ENTER	30:PRINT C	Write in corrected line.		

Pressing or key once after the recall of a line, recalls the cursor. (Steps 2 and 7 in the above table)

The cursor shows up at the beginning of first statement; a colon (:) after line number disappears, leaving a space there.

 Upon reaching a 1-step imperative statement (such as INPUT or PRINT) the cursor positions only at its first character.

If you make a change in this first character, the entire statement disappears from the display. (Step 8 above)

Inserting lines

To insert lines into written programs, follows this procedure:

- (1) Select the PRO mode.
- (2) Input a line. This line must be given a line number between the line numbers before and after where you want it to be positioned in the program.

If you wish to insert a new line between lines 10 and 20, you must number the new line within 11 to 19.

(3) Press the press key. The new line is then written into the program memory.

Example: Insertion of PAUSE A, B between lines 10 and 20 of PROGRAM 1. (New line number is 15.)

10: INPUT A,B ______15: PAUSE A,B 20: C=√(A*A+B*B) 30: PRINT C 40: END

Operation	Display	Note		
Set to the PRO mode.				
15 P A U S E	15PAUSE_			
A SHFT , B	15PAUSEA,B_	line 15 is put in.		
ENTER	15: PAUSE A,B	Writing (insertion) of line 15.		
CL [10:INPUT A,B)		
I	15:PAUSE A,B	Checking		
Ţ	20:C=√(A*A+B*B)]		

Deleting lines

To delete a certain line from the corresponding stored program, follow these procedures:

- (1) Select the PRO mode.
- (2) Input only the line number of the line you want to delete, and press the even key.

Example: Deletion of line 15.

Operation	Display	Note
Set to the PRO mode.		
15	15_	Input the line number of line to be deleted.
ENTER	>	line 15 is deleted.
	10:INPUT A,B 20:C=√(A*A+B*B)	Checking

5. Executing programs

You must execute programs in the RUN or DEF mode.

[Procedures]

- Select the RUN mode.
- Press the R , U , N and MR keys. The Computer starts the execution of program.
- When program execution stops at an INPUT instruction, the "?" symbol then appears, input data and press [1978] key.
- When program execution stops at a PRINT instruction, Calculation result is displayed, press key without inputting data.
- Program execution comes to an end at an END instruction. The prompt symbol then appears.



Example: Execution of PROGRAM 1

()

- (1) When A = 12.3, B = 15.7
- (2) When A = 36, B = 27

Operation	Display	Note
Set to the RUN mode.		
R U N EMTER Refer to ③ above { 12.3 EMTER 3 { 15.7 EMTER Refer to ④ above { EMTER R U N EMTER 36 EMTER	RUN_ ? 12.3_ ? 15.7_ 19.94442278 } ?	Inputting RUN instruction. Execution starts. Inputting data (A) Inputting data (B) Result appears. Execution ends. Execution starts.
27 ENTER Refer to (5) above ENTER	45.	Result appears. Execution ends.

6. DEBUGing programs

The DEBUG function helps you ckeck to see if prepared programs are working properly. Programs are executed a line at a time so you can check the progress.



Example: Debugging of PROGRAM 1

When A = 36, B = 27

Operation	Display	Note
Set to the RUN mode		
D E B U G EMER	የ	DEBUG command commences debugging.
36	36_) Inputting of data
	?	INPUT instruction for line 10 is executed.
27	27_	After execution of the above instruction, the Computer
I	10:	displays the line number and stops.
(kept pressed)	10:INPUT A,B_	Checking of executed instruction; the cursor indicates the executed instruction — ENTER in this example. (i.e. space)
Release the 1	>	The prompt symbol appears after display of line 10.
I	20:	After the debugging of line 20, its line number is displayed.
I	45.	Display of calculation result (execution of PRINT statement)
A EMER	36.)
B ENTER	27.	Checking of memory contents
	30:	The computer stops after debugging line 30.
	>	Debugging ends.

(For DEBUG command, refer to page 71.)


In debugging, as shown above, pressing the 🗓 key executes the instruction on each line.
While execution is stopped, you can manually check memory data contents; (just press A emen or B emen).
The T key activates the debugging operation (even if pressed after checking memory contents). Again, when execution stops, the cursor indicates the step where the Computer is waiting and you can display the corresponding program line by pressing the L key.
 To interrupt debugging and resume normal operation, use the CONT command.
C O N T ENTER

[Rapid debugging]

If you hold the 🚺 key down for one second or more, the Computer will stop debugging and will start to execute programs as normal.

When you release the 🗓 key, the Computer will resume the debugging mode as soon as it finishes executing the present line.



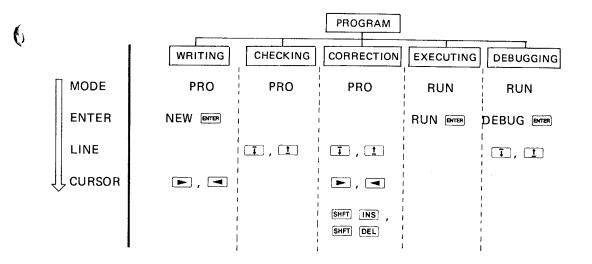

7. Defined programs

When more than two programs are written in the program memory, the second, third, etc. programs then can be executed by the key operation: R U N [line number] PMPB . If keys A , S or D are defined by assigning programs to them, you execute those programs by using SHFT A or SHFT S in the DEF mode.

To assign programs to certain keys, you must write the labels of those keys at the beginning of the programs you want to assign: for example "A" for key A. (You must place the label right after the line number entry.)

The following 18 keys are definable.

Δ,	S,	D,	F,	G,	H,	J,	K,	Œ,	=,
Z,	X,	C,	V,	В,	N.	M.	SPC		•

Examples of defined programs written in and executed.

PROGRAM 2

Program	Note
10: "A": INPUT A,B 20: C=√(A*A+B*B) 30: PRINT C 40: END	Label A $C = \sqrt{a^2 + b^2}$: Pythagoras's theorem
50: "S": INPUT D 60: E=4/3*π*D^3 70: PRINT E 80: END	Label S $\sqrt{=\frac{4}{3}} \pi r^3$: Volume of sphere
90: " ": INPUT F,G,H 100: I=√(F*F+G*G-2*F*G*COS H) 110: PRINT I 120: END	Label SPC (space) $C = \sqrt{a^2 + b^2 - 2ab\cos\theta} :$ Law of cosine

Writing

Operation	Note
Set to the PRO mode	
N E W ENTER	
A colon behind a label can be eliminated.	
10 SHFT !! A SHFT !! SHFT : I N P U T A SHFT , B ENTER	Label A
20 C = (A * A + B * B) (MER)	
30 PRINT C EVER	
40 E N D EMTER	
50 SHFT II SHFT : I N P U T D EMTER	Label B
60 E = 4 / 3 * SHFT 7C * D SHFT A 3 EMER	
70 PRINTE EMER	
80 E N D ENTER	
90 SHFT II SPC SHFT II SHFT : 1 N P U T F SHFT ,	Label SPC
G SHFT 9 H ENTER	(Space)
100 L = - (F * F + G * G - 2 * F *	
G * C O S H) EMTER	
110 P R I N T I DATER	
120 E N D ENTER	

Execution

Operation			Display	Note
Remember to select th	e DEF mode			
	SHFT A	የ		Execution of the program labeled A starts.
(When A = 4)	4 ENTER	የ		
(When B = 3)	3 ENTER		5.	Result
	ENTER	>		End
	SHFT S	የ		Execution of the program labeled S starts.
(When D = 2)	2 ENTER		33.51032164	Result
	ENTER	>		End
DEGR	E E ENTER	› የ		Set to DEGREE Angular mode.
(When F = 12)	12 ENTER	· የ		Execution of the program labeled SPC starts.
(When G = 14)	14 Exter	የ		
(When H = 30)	30 EMER		7. 001104508	Result
	ENTER	>		End

To resume execution after being interrupted with an INPUT or PRINT instruction, press key as shown in the example above.

- When an identical label is given to two or more lines, the lowest line number is executed.
- Inputting an undefined key causes an error. (Error code: 2)

VARIABLES



1. What is a variable?

A variable is a letter (or character combination which represents a memory location in which information can be stored (this information often is called data and can be a number or series of characters).

In this Computer variables are divided into fixed memories (26 pieces) and a flexible memory (refer to "Calculations Using Memories" on page 15). The memories store not only numerical values, but they can also store items composed of characters (such as a person's name or item name).

Numerical variable

A data memory is called a numerical variable when it's storing numerical values, and is labeled as A, B, C, A(1) or A(28).

Character variable

A data memory is called a string or character variable when it's storing a sequence of characters, including letters, blanks, numbers, special symbols, and is labeled as A\$; B\$; C\$ or A\$(1) (the \$ being called a "string" — e.g. "A-string", etc.). (One data memory can contain a maximum of seven characters.)

10:INPUT A\$, B\$ 20:PRINT A\$, B\$

Operation	Display	Note
Set to PRO mode		
N E W enter	>	Clears the memory
10 I N P U T	10 INPUT_	
A SHFT \$ SHFT 9	10 INPUT A\$, _	
B SHFT \$	10 INPUT A\$, B\$_	
ENTER	10 : INPUT A\$, B\$	
20 PRINT	20 PRINT_	
A SHFT \$ SHFT •	20 PRINT A\$,_	
B SHFT \$	20 PRINT A\$, B\$_	
ENTER	20: PRINT A\$, B\$	
Change PRO mode to RUN		
R U N EMTER	?	
SMITH	SMITH_	
ENTER	?	A\$ is loaded with "SMITH"
26438	26438	
ENTER	SMITH 26438	B\$ is loaded with "26438."

Note:

If a variable loaded with a numerical value is specified as a character variable, or if a character variable is specified to store a numerical value, an error (error code: 1) occurs. This error will not occur when variable are cleared, that is, when a numerical variable is loaded with 0 or a character variable is loaded with no character.

2. Specifying variables

Fixed memory

1. Specify fixed memories simply by pressing a single key such as A, or two or more key such as B SHFT \$.

Example: A

→ Numerical variable A is specified.

SHFT Sheet
2. Fixed memories A through Z or A\$ through Z\$ are individually given serial numbers 1 through 26, and are specified by inputting codes such as A(1) and A(5) or A\$(1) and A\$(5).

Example: A (1)

→ Numerical variable A is specified.

A\$ (1)

→ Character variable A\$ is specified.

A (48-25)

→ Numerical variable A(23), namely W, is specified.

A\$ (3 * 4)

Character variable A\$(12), namely L\$, is specified.

When you use the form A () or A\$ (), only the integer part of parenthesized value is
effective.

Memories specified in the form of A () or A\$ () are called dimension memories.

You should note that memories A through Z, and A(1) through A(26), A\$ through Z\$ and A\$(1) and through A\$(26) actually use the same memory location. For example, A, A(1), A\$ and A\$(1) all use the same memory location. And E, B(5), E\$ and C\$(5) all use the same memory location. Only one value or piece of data can occupy any given memory location at one time.

When B or A(2) is entered, for example, data memory B is specified as a numerical variable; when B\$ or A\$(2) is entered (the same data memory, namely memory B) is specified as a character variable.

Flexible memory

Flexible memory is specified in the form A () or A\$ () in the same manner as in 2 above. But when the value in parentheses is smaller than 27, this flexible memory is not specified, since number of fixed memories is 26.

Example: A(27) → Specification of numerical variable A(27) (flexible memory) → Specification of character variable A\$(28) (flexible memory)


Note:

| Data memory (Numerical memory (Numerical variable) Character memory (Character variable) |

The memories of the TRS-80 Pocket Computer

	Α,	A\$,	A(1),	A\$(1)
	В,	B\$,	A(2),	A\$(2)
26 memories			:	
	Z,	Z\$,	A(26),	A\$(26)

Data memory (Fixed memory)

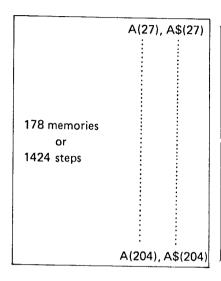

Program memory

Any program memory left open (unused) after the programs are stored can also be used for data memories. When used for Data memory it is called a flexible memory. Thus, the number of available memories varies depending on how many steps are used to store programs. So, when using the flexible memory, you should always check in advance how many memory locations are available (by using the MEM command).

(For MEM command, refer to page 73.)

NOTE: 8 steps of program equals one data memory.

Indirect designation

An indirect designation of memories (variables) is a method of designating an arbitrary memory (numerical variable) corresponding to its contents.

The indirect designation is made in the form of A(B) or A\$(B); that is, a numerical variable is put in a set of parentheses.

With this method you can specify all data memories (variables) according to their contents — only the integer parts of them are effective.

Example: A(A)

→ A numerical variable that is given a serial number corresponding to variable A

 A(A(3)) \rightarrow A$ character variable that is given a serial number corresponding to variable A(3), namely C (3rd fixed memory location).

Following are some examples of the advantages of indirect memory designation.

Example: Programs where data is put in variables B through Z.

10: INPUT B, C, D,, Z :

When variables B through Z are directly specified in line 10.

10:FOR A=2TO 26 20:INPUT A (A) 30:NEXT A The value of A varies from 2 to 26; programs stored in the variables corresponding to those numbers are repeatedly executed.

In response to the program, variables B through Z are executed in sequence.

The indirect method of designating memories can provide a depth of up to 15 stages by specifying dimensioned memories in sets of parentheses.

Example:

(1)

When
$$C = 2$$
, $B = 6$, $F = 8$.

 $A(A(C))) \rightarrow Variable H is specified.$

$$\begin{array}{c|c}
A & (A & (C) &) \\
A(2) = B = 6 \\
\hline
A(6) = F = 8 \\
A(8) = H
\end{array}$$

Note:

In designation of dimension memories, when a specified value is below 1 or exceeds the area within which the flexible memory is specified, an error occurs. (Error code: 4)

3. Inputting to variables

You can load the memories (variables) with numerical values or chracters in the following forms:

General form (1) [Numerical variable] = (Expression)

The value of (expression) is put in a numerical variable specified on the left side of the above equation.

Note: (expression) also covers a numerical variable.

General form (2) [Character variable] = "Characters"

Characters (letters, numerals, blanks, symbols, etc.) between quotation (") marks on the right side are put in the characater variable specified by the left side of the equation.

When the number of characters on the right side exceeds 7, only the first seven characters are put in.

Note: When clearing the equation, specify the right side of the equals as ".

General form (3) [Character variable] = [Character variable]

Characters stored in the character variable specified by the right side of the above equation are put in the character variable specified by the left side.

Examples: A = 5 * 6 Exten

→ The result of 5 * 6, 30, is put in variable A.

A\$(27) = "USA" ENTER

Characters "USA" are put in variable A\$(27).

B\$ = A\$ (9 * 3) \rightarrow Characters stored in variable A\$ (27) are put in variable B\$.

Example: A program that recalls names of fruit corresponding to predetermined name codes 1

through 26 put in the Computer. (Indirect designation)

Key in:

code (number)

Display:

character (name of fruit)

(The program assumes that you already have stored the fruit names in A\$ through

Z\$).

10: INPUT A(27) 20 : PRINT A\$ (A(27))

Operation Set to the PRO mode N E W ENTER 10 I N P U T A (27) ENTER 20 P R I N T A SHFT \$ (A (27) ENTER

Contents of data memories

ORANGE Α 1 APPLE В 2 С BANANA 3 D **MELON**

> When data is input by manual operation

Operation	
Set to the RUN mode	
A SHFT \$ = SHFT 11	
ORANGE SHFT II ENTER	
B SHFT \$ = SHFT II	
A P P L E SHFT II ENTER	

Operation	Display	Note
Set to the RUN mode		
R U N EMER	9	
2	2_	Inputting a number
ENTER	APPLE	Display of corresponding fruit's name

4. Recalling the contents of variables

To recall the contents of memories (variables), use the following form:

General form

[variable] EMER

Example: When 120 and "GOOD" are stored in A and B\$ respectively.

Oper	ation	Dis	splay	Note
RUN mode	A	Α_		Designation of numerical variable
	ENTER		120.	Display of number stored there
]	B SHFT \$	B\$_		Designation of character variable
	ENTER	GOOD		Display of characters stored there



Note: If you recall the contents of cleared memories (variables) using a NEW or CLEAR command, "0." is displayed when they are specified as numerical variables and a blank space appears when recalling a cleared memory character variable.


If a memory is loaded with -0 and specified as a character variable, an error occurs (Error code: 1).

Also, if you clear a variable specified as given in General Form (2) or (3) and then attempt to recall it as a numerical variable, an error also occurs (Error code: 1).

Comments:

Vacant program memory areas are available to be used as flexible memory. Programs can be written into the program memory until its capacity is exceeded. Accordingly, keep in mind that if you edit programs (insertion, deletion, correction) this changes program steps or content, and this may affect the number of flexible memory space available.

For example, when programs are written as shown in illustration (A) below, recalling or writing the contents of flexible memories A(42) or A\$(42) results in an error (Error: 4) because no flexible memories exist corresponding to such codes.

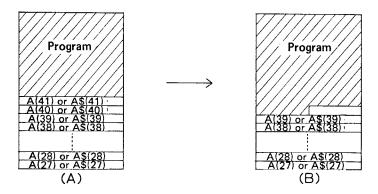

Also, when the arrangement of progras written (added) as shown in illustration (A) is changed to be as shown in illustration (B), flexible memories corresponding to A(41) or A\$(41) and A(40) or A\$(40) disappear. Thus if you try to recall or write to these memories, an error occurs (Error: 4).

By contrast, a string of programs stored as shown in illustration (B) can be shortened as shown in illustration (A) (by editing), the number of memories available to be used as flexible memories increases in proportion to the degree of the change.

(One flexible memory corresponds to 8 program steps.)

Note: When you try to recall flexible memory which is loaded with nothing, unexpected displays might appear or an error might occur (Error: 1).

PROGRAM STATEMENTS

In this section we use the following form for various terms, [variable], [numerical variable], [character variable] and (expression).

[Variable]: General name for numerical and character variables.

[Numerical variable]: General name for fixed memories defined by A through Z and dimensioned

memories defined in the form of A ()

[Character variable]: General name for fixed memories defined by A\$ through Z\$ and dimen-

sioned memories defined in the form of A\$ ().

(Expression): Operational expression composed of elements of (expression) as we des-

cribed on page 18, covering also [numerical variable].

1. LET statement

The variable name on the left is assigned the value of the constant or expression on the right. The TRS-80 Pocket Computer does not require LET except when it is used with an IF statement. (For IF statement, consult page 60.)

General form (1) LET [Numerical variable] = (Expression)

Example: LET A = 5 * 3

Example: LET A = 123 Instruction to put 123 in A (LET can be omitted as in the

following example.)

A(30) = 3 * 6 Instruction to put 18 in A (30).

A (2 * B) = C + D Instruction to put the value of C + D in A (2 * B).

General form (2) LET [Chracter variable] = "Character"

Example: LET Z\$ = "BASIC"

Characters between quotation marks are put in the character variable specified by the left side.

When the length of a string of characters on the right side exceeds seven characters, only the first seven characters are put in (the excess is discarded).

General form (3) LET [Character variable] = [Character variable]

Example: LET A\$(25) = Z\$

Characters stored in the character variable specified on the right side are placed in the character variable specified by the left side.

Example: A\$ = "NON" Instruction to place "NON" in A\$.

A\$(28) = "DATA?" Instruction to place "DATA?" in A\$(28).

C\$ = A\$ Instruction to place characters stored in A\$ in C\$.

• General forms (1) thru (3) can be put on a single program line by dividing them with commas (,).

In this case, LET must not be used after a comma (,).

Example: 10 : LET A = 2, B = 7, C\$ = "A = 2, B = 7"

2 is placed in A, 7 in B and "A = 2, B = 7" in C\$.

2. INPUT statement

This is an instruction which requests manual input data during program execution.

General form (1) INPUT [Variable], [Variable], ...

Example: INPUT A, B, C,

The instruction causes the Computer to stop program execution and display a question mark "?". When you respond by inputting data to the Computer and pressing key, the Computer stores data in a specified variable.

The Computer carries out this process the number of times that corresponds to the number of variables specified after an INPUT statement.

General form (2) INPUT "Character", [Variable], "Character", [Variable], ...

Example: INPUT "A =", A, "B =", B, ...

This form of instruction causes the Computer to stop program execution and display a message instead of "?."

Example

Programming	Note
10:INPUT A,B	General form (1)
20:INPUT "C=",C, "DATA D=",D	General form (2)

Execution

Operation	Display	Note
Set to the RUN mode		
R U N ENTER	9	Display in general form (1)
3	3_	Inputting data
ENTER	?	3 is placed in A. Display in general form (1)
4	4_	Inputting data
ENTER	C=	4 is placed in B. Display in general form (2)
5	5_	Inputting data.
ENTER	DATA D=	5 is placed in C. Display in general form (2)
6	6_	Inputting data
ENTER	>	6 is placed in D.

General form (3) INPUT "Character"; [Variable], "Character"; [Variable] ...

Example: INPUT "C ="; C , "D ="; D ,

In general form (2), if data is input after the display of a message, that message disappears. In general form (3), if a semicolon (;) is entered after "Character", message does not appear and data can be displayed following that "character."

10: INPUT "DATA E= "; E

Operation		Display	Note
Set to the RUN mode			
R U N ENTER	DATA	E=_	A display indicating that the Computer is waiting for input in general form (3).
5	DATA	E=5_	Inputting data
* 6	DATA	E=5*6_	((expression)).
ENTER			30 is placed in E.

General forms (1) to (3) can be intermixed with each other.

Example: INPUT A, "B =", B, "WHO?"; C\$

- There is no limit on the length of characters between quotation marks that specify a message in general forms (2) and (3).
- You can make a correction by pressing CL key in the course of inputting data.
 However, in general forms (1) and (2), pressing the CL key displays a question mark "?" alone; with general form (3) the entire message is displayed again.

If you pressed key and an error occurs, press CL key; either "?" alone or the entire message will appear as noted above.

Note: [Variable] specified in general forms (2) and (3) must be a fixed memory, a dimensioned memory (that is specified by a code, such as A (30) or A (B), that contains a fixed memory inside the parentheses, or an integer with no sign.)

You must be aware that you cannot use a form such as A(A(30)) or A(5 * 9). You must also note that indexing the sufficient was when [variable] is a character variable in general forms (1) to (3) will prevent you from using a character variable in the subsequent inputs.

[Skip operation]

If your press the key without inputting data in response to INPUT statements, the Computer will skip the remaining statements on that line and go to the next line.

Example: PROGRAM 3 (Average)

Programming	Note
10: "A":CLEAR 20:INPUT "DATA A=";A:B=B+A:	Definition: memory is cleared. Inputting data: sum Counting data number: Jump Computing average (PRINT statement in general form (5)) End

The above program will find average; you must input data, the program sums the data and counts the data number in line 20, on completion of data input, the Computer will skip the statements responsible for summing and counting, and will drop down to line 30.

Execution Data 12, 24, 19, 23

Operation		Display	Note
Set to the DEF mode			
	SHFT A	DATA A=_	Execution begins.
	12 ENTER	DATA A=_	1
	24 ENTER	DATA A=_	Inputting data
	19 ENTER	DATA A=_	Inputting data
	23 EMER	DATA A=_)
	ENTER	AVERAGE= 19.5	A skip operation occurs by corressing the ENTER key
	ENTER	>	without entry of data.

3. PRINT statement

The PRINT statement is an output instruction to display calculation results.

This instruction commands the Computer to stop program execution after it has displayed information specified by this instruction.

To restart program execution, simply press the key without entry or have the Computer execute a CONT command. You need not input anything.

General form (1) PRINT (Expression)

Example:

PRINT 123 + 456

PRINT A

General form (2) PRINT "Character"

Example: PRINT "Character"

This form commands the Computer to display characters between two quotation marks. Length of a string of characters is limited to 80 (capacity of one line).

General form (3) PRINT [Character variable]

Example: PRINT A\$

This form causes the Computer to display the contents of [character variable].

Example:

Programming	Note
10:INPUT A\$	Input instruction
20:PRINT 5*6	General form (1)
30:PRINT "PROGRAM A"	General form (2)
40:PRINT A\$	General form (3)

Operation	Display		Note
Set to the RUN mode			
R U N ENTER	የ		Execution of input instruction
WORLDENTER		30.	Inputting "WORLD"
			Display in general form (1)
ENTER	PROGRAM A		Display in general form (2)
ENTER	WORLD		Display in general form (3)

General form (4)	PRINT	{ Expression > "Character" [Character variable]	, (<pre></pre>
------------------	-------	---	-----	-------------

Example: PRINT A, B

PRINT "A = " , A

The 24-digit display is divided into two sections: right and left 12-digit sections. The right section displays the first set of (expression), "character" and [character variable] ahead of comma (,), and the left section another set.

The value of (expression) is displayed in 12 digits (right or left sections).

When the whole numerical data cannot be displayed in 12 digits, the least significant decimal-digits are cut off, and when the length of a string of characters exceeds 12 digits, only the first 12 digits are displayed.

Example:

Polar coordinates → rectangular coordinates program

This program converts polar coordinates (r, θ) into rectangular coordinates (x, y).

10: INPUT R, C

20:X=R*COS C:Y=R*SIN C

30:PRINT X, Y

40: END

Operation		Display		Note
Set to the RUN mod	de			
DEG				
R	U N ENTER	?		
(When r = 12)	12 ENTER	?		
(When $\theta = 30^{\circ}$)	30 ENTER	10.39230485	6.	Two numerical values are displayed at the same time.
		Value of x	Value of y	

Example: PRINT "A =" ; A ; "B = " ; B ; \cdots

PRINT A\$; B; C\$; C; · · ·

The form provides a concurrent display of multiple information; information items are separated with a semicolon (;).

Example:

Programming	Note
10: "A" : CLEAR	
20:INPUT "DATA=";A	Input instruction
30:B=B+A:C=C+1	Sum: count of data number
40: PRINT " TOTAL = "; B; " QTY = "; C	Total of sums: display of data number
50:GOTO 20	Jump to line 20

Operation		Display	Note
Set to the DEF mod	е		
St	IFT A	DATA=_	
456	ENTER		Display in general form (5)
789	ENTER	TOTAL=1245. Q TY=2.	Display in general form (5)

When the number of characters to be displayed exceeds 24, only the first 24 characters are displayed.

Note: The 2nd and subsequent display items can be only "character" and "variable"; the "variable" must be a fixed memory, or a dimensioned memory that has a fixed memory in parentheses or that is specified by an integer (up to 204) with no sign [such a manner as A (30) or A\$ (C)].

4. PAUSE statement


The PAUSE statement is an output instruction like a PRINT statement. But, these statements are different in function. The PRINT statement causes the machine to temporarily stop program execution after it has executed (displayed) a given instruction, while the PAUSE statement forces it to display a specified item for about 0.85 sec., and <u>restart program execution automatically</u>. The definition form (general form) of PAUSE statement is the same as for the PRINT statement.

5. USING statement

The USING statement is an instruction to specify a PRINT or PAUSE display format for numerical data.

General form (1) USING "##...#. ##...#^"

This form of USING statement specifies a format depending on the number of "#" between quotation marks, \bullet and \wedge .

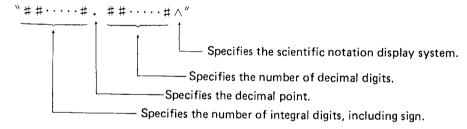

General form (2) USING (Statement end)

"Statement end" would be an ere or a colon (:).

This form commands the Computer to cancel the format specification. That is, a PRINT or PAUSE statement used after this form of instruction will display numerical information in the same format as a manual calculation.

Example: Display 123.4567891 with PRINT or PAUSE statement.

1 O: A=123.4567891

20: USING "Specified format"

30: PRINT A

Specified format	Display
Cancel	123. 4567891
#	
##	Error (Error code: 6)
# # #	
# # # #	123
# # # # #	123
####.	123.
######. #	123. 4
#######. ###	123. 456
####. ######	123. 4567891
####. #########	123. 456789100
##. ###^	1. 234 E 02
####. ######	1. 234567 E 02
###. ########	1. 234567891 E 02
#######: ^	1. 234567891 ₺ 02

When the scientific notation display is specified, a 2-digit display is always assured regardless of how many integral digits you specify. Besides, the number of specified " Λ " does not affect the display at all.

When numerical data cannot be displayed in a specified format, an error (Error code: 6) results.

Formats can be specified (a) or canceled (b) by USING even in a PRINT or PAUSE statement. In this case the part after the USING statement is defined with a semicolon (;).

Example:

```
10:A=-123.456
20:PAUSE USING "#####"; A
30:PAUSE USING "####.#"; "A=", A
40:PAUSE "A=", USING "####. #"; A
50:PAUSE A, USING "####. ##"; A
60:PAUSE A; USING "####"; A
70:PAUSE USING ; A
```

Operation	Display	/	Note
Set to the RUN mode			
R U N ENTER		- 123	
	A=	-123.4	
	A=	-123. 4	•
	-123.45	-123.45	
	-123. 45-123		
		-123.456	

Note:

If USING is put in a PRINT or PAUSE statement of general form (4), a display of numerical data occurs according to the format in which the latter half of the numerical value of those statements is displayed. Thus, two numerical data are displayed in the format specified for the latter data, even though their display format is individually specified. (This is true of line 50 in the above example.)

6. GOTO statement

The GOTO statement is an instruction to make program execution jump to a specified line.

General form (1) GOTO (Expression)

Example:


GOTO 10

GOTO 5 ★ 9

GOTO A

This form makes program execution jump to a line that corresponds to the value of (expression). The value of "expression" is effective in its integer part only (limited to 1 through 999). Other values cause an error (Error code: 2).

Example:



Example: Indirect jump

:

10: INPUT A


20: GOTO A — A=30 40: A=40 50: A=50

Jumping occurs in accordance with the contents of A.

Example: GOTO "AB"

This form causes a jump to a label whose contents are the same as those of "character" or [character variable]. The length of "character" and label is limited to seven characters. Thus, if you use a label of more than 7 characters, the Computer ignores all after the first 7.

Example:



In the execution of "GOTO A\$" in line 90, when the contents of A\$ are "ME", a jump to label "ME" occurs, and if "YOU", a jump to label "YOU" occurs.

Note:

No statement can follow a GOTO statement; a line with a GOTO statement must have the GOTO statement at the end of the line.

7. IF statement

IF is a statement which uses conditions to determine action (condition can be "larger/smaller" decision, "equal" decision, "not-equal" decision, etc.).

General form (1) IF (Expression > Logic operation (Expression > Execution statement Logic operator: <, <=, =, >, >=, <>

If the relational expression that follows IF is affected [if the logical operation results in 1 (true)] the next statement (instruction) is executed, and if not [if the logical operation results in 0 (false)] the program skips the next execution statement, going to the following line.

Example:

:
40: |F A*B>=C PAUSE A*B:GOTO 90
50: A=A+1
:
90: A=A+B
:

If A * B > = C, the program begins by executing the next statement "PAUSE A * B". If A * B < C, the program begins by executing line 50, "A = A + 1", skipping "PAUSE A * B: GOTO 90". Note: 1. If you want to execute a LET statement directly after executing an IF statement, be sure to add a LET.

Example: IF
$$B > C$$
 LET $B = B + 1$

2. When a GOTO statement follows an IF statement, the former can be defined with THEN statement (in this case the THEN statement has the same function as the GOTO statement).

Example: IF
$$B \ge C$$
 THEN 50 \longleftrightarrow IF $B \ge C$ GOTO 50

IF (Expression) Execution statement

If its value is larger than 0, the < expression > is judged to be true, and the next statement will be executed.


If its value is 0 or smaller than 0, the \(\) expression \(\) is judged to be false, and the program execution goes to the next line.

Example:

```
30: IF AGOTO 80
40:A=B*C
```

If A > 0, "GOTO 80" is executed. If $A \le 0$, "A = B \star C" on line 40 is executed.

IF { "Character" [Character variable] } = { "Character" [Character variable] } General form (3)



Example: IF A\$ = "ABC" IF A\$ = B\$

The Computer compares the contents of "character" or [character variable] on both sides of =; if they are equal, it executes the next statement; if they are not equal, it moves directly to the next line.

Example:

30: IF A\$= "GUARD" GOTO 100 40: INPUT A\$

If the contents of A\$ are "GUARD," "GOTO 100" is executed. If not, "INPUT A\$" in line 40 is executed.

• When the length of "character" is more than 7, only the first 7 characters are used for comparison, and the excess is ignored.

General form (4) IF [Character variable] Execution statement

If any character is stored in the [character variable], the next statement is executed. If nothing is there, the program moves to the next line.

8. GOSUB statement, RETURN statement

When you use a certain processing procedure a number of times, you will have a more efficient program if you handle these procedures as a sub-routine.

When a program comes to a GOSUB statement, the Computer moves to a specified line or label and executes the programs stored there.

At the end of a sub-routine you must add a RETURN statement, which returns program execution to the statement immediately after the GOSUB statement.

A subroutine can contain other subroutines, up to a maximum of 4 levels.

(1) GOSUB statement

General form (1) GOSUB (Expression)

Example:

GOSUB 10

GOSUB A

General form (2) GOSUB

("Character" [Character variable]

Example:

GOSUB "ABC"

GOSUB A\$

The RETURN statement must be at the end of a line (it can not be followed by any other another statement on the same line.

(2) RETURN statement


General form RETURN

The RETURN statement must be at the end of a line (it can not be followed by any other statement on that line).

Note: An error (error code: 3) occurs, if a RETURN is used without a GOSUB earlier on.

Also be sure to put END statement on end of main routine, else computer will go into subroutine and error 3 will occur.

Example 1

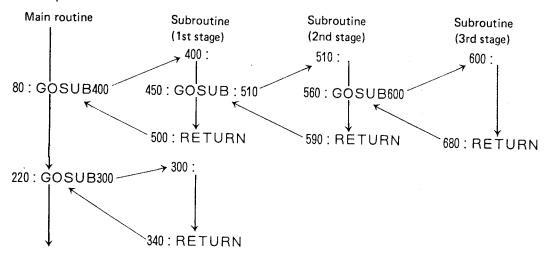

Example 2: PROGRAM 4 (Approximate definite integral by Simpson's method)

Formula


Compute a definite integral by using Simpson's rule.

$$S = \int_{x_0}^{x_{2p}} f(x) dx = \frac{h}{3} [(y_0 + y_{2p}) + 4(y_1 + y_3 + \dots + y_{2p-1}) + 2(y_2 + y_4 + \dots + y_{2p-2})]$$

$$h = \frac{(x_{2p} - x_0)}{2p}$$

p: number of divisions

[Example]



$$y = x^{3} - 2x^{2} - x + 2$$

$$= ((x - 2)x - 1)x + 2$$

$$\int_{0}^{1} y \, dx = \frac{13}{12}$$

Write in the function, as a subroutine, after line 500.

Set to PRO mode (by pressing MODE key).

500 Y =
$$((x-2)*x-1)*x+2$$
 EMTER

510 RETURN EMER

This ends writing.

Next, change to DEF mode, and execute.

Programming	Note	
10: "A": INPUT "X0="; D,"X2P="; E, "P="; F		
20: $B = (E - D) / 2 / F$		
30: A = 0: X = D: GOSUB 500		
40: A = Y + A: X = X + B: GOSUB 500		
50: A = Y * 4 + A: X = X + B: GOSUB 500		
60: $A = Y + A$: $F = F - 1$		
70: IF F <> 0 GOTO 40		
80: C = A *B / 3		
90: BEEP 3: PRINT "ANS.", C		
100: END		
500: $Y = ((X - 2) * X - 1) * X + 2$		
510: RETURN		

Some Notes to help you understand this program:

Line 30 sets memory "A" to accumulate 'Y' values. Memory "X" is to be 'X'. Since the initial value of 'X' is in memory "D", first input value of "D" to "X". The GOSUBs to calculate first 'Y' value.

Line 40 adds calculated 'Y' to memory "A". 'X' is incremented by 'H'. Again GOSOBs to calculate next 'Y' value. Now, the order of 'X' and 'Y' is of odd number.

According to the Program we have to multiply by 4. So line 50 multiplies by 4.

'X' is incremented and GOSUBs.

Line 60 adds the 'Y' to "A". Now we are in even number order. Why don't we multiply by two? See second portion of line 60 and line 70. Memory "F" (in which the number of division is stored) is decremented by one. Line 70 compared result with zero. If not zero, we've not yet reached the last 'X' and 'Y' and returns to line 40 where 'Y' is added again I.E. multiplied by two. If F=O, then we reached the last, and according to the program the last one should not be multiplied by two, so program goes to next line and does the last calculation (multiply by 3/H).

Operation	Display	Note
Set to the DEF mode		
SHFT A	X0 =	
O ENTER	X2P =	(x_0)
1 ENTER	P =	(x_{2p})
20 ENTER	ANS. 1.083333333	(P)

When the present is pressed at this step, the Pocket Computer starts the calculation while displaying the "RUN" symbol and about 40 seconds later, an answer will be displayed with 3 beep sounds.

Debugging the program will help you understand its execution process. Try it.

9. FOR statement, NEXT statement

When you need to execute identical programs repeatedly, or when you need to solve a calculation equation repeatedly by replacing only the values of variables contained in it, the FOR-NEXT statement will provide an efficient method. (Of course you can combine it with the decision function capability of GOTO and IF statements.)

General form (1) FOR [Numerical variable] = \langle Expression 1 \rangle TO \langle Expression 2 \rangle NEXT [Numerical variable]

Example: FOR A = 1 TO 26

NEXT A

The FOR and NEXT statements (plus numerical variables) are used as a pair, and instructions between these statements are repeatedly executed the specified number of times.

In the first execution, the value of (expression 1) is stored as the initial value in a specified numerical variable.

When the Computer comes to the NEXT statement, it adds an increment of 1 to the numerical variable and executes the instructions between the FOR and NEXT statements and loops back to the FOR over and over until the numerical variable is equal to (or more than) the value of (expression 2).

General form (2) FOR [Numerical variable] = (Expression 1) TO (Expression 2) STEP

⟨ Expression 3 ⟩


NEXT [Numerical variable]

Example: FOR A = 1 TO 26 STEP 2

NEXT A

This form differs only in that the STEP increment is a value other than 1 (expression 3). In program execution, a set increment is added to the [numerical variable] every execution. If the value of (expression 3) is negative, program execution occurs repeatedly until the value of the [numerical variable] is equal to or smaller than the value of \langle expression 2 \rangle .


- Only the integer values of (expression 2) and (expression 3) are effective and are limited to less than three digits. When the value of < expression 3 > is 0, an error (Error 1) occurs.
- A FOR-NEXT statement can have up to 4 levels (or loops as to they are often called).

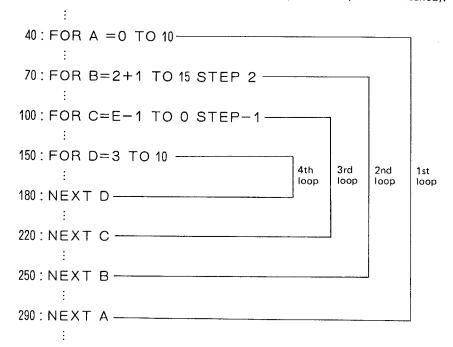

Note: When using memory locations (variables) with FOR-NEXT statements, use 23 (W) and after for fastest execution.

In the following cases, an error will occur during execution.


(Crossing)



Crossing of (1) and (2)

In this case, the FOR-NEXT statement of (1) will be executed, an error (error 4) will occur in the execution of line 25 because "FOR B = 5 TO 10" on line 15 can not be incremented (NEXT B can never be executed).


Joining in mid course



Line 25 joins line 15 with the (1) loop


The result is that program execution moves from line 25 to 15, and generates an error (error 4) code as soon as it reaches line 20.

Example: Program 5 (Decision of order)

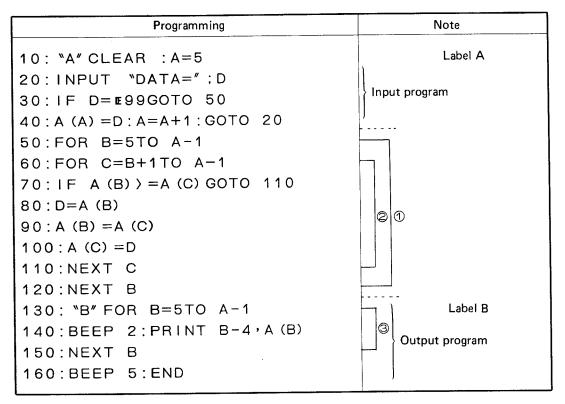

(1), (2) and (3) indicate the loops of FOR-NEXT statements.

Program debugging will help you understand the process of program execution caused by a FOR-NEXT statement.

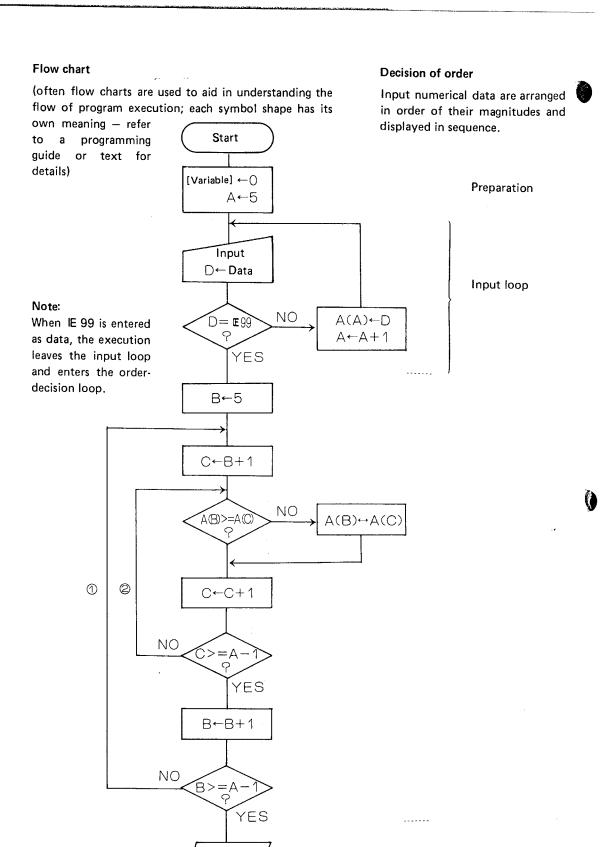

(Output loop is omitted.)

Output

A(B)

End

10. STOP statement

This statement is an instruction to temporarily stop program execution.

General form

STOP

When the Computer executes the STOP statement, it displays a BREAK message together with line number, and stops program execution.

Manual operation is then possible. To restart program execution, use a CONT command.

Example:

100:C=3*7 200:STOP

300:PRINT "C=" ;C

:

Example:

When the STOP statement is executed on line 200, the Computer displays BREAK as shown below.

Operation	Display		Note
	BREAK AT 200		Display of BREAK message
C	C_		When program execution
ENTER		21.	stops due to STOP state- ment, Manual calcula-
4 * 8 ENTER		32.	tions are possible.
CONT	CONT_		CONT command restarts program execution.
ENTER	C=21.		program execution.

11. END statement

The END statement is an instruction to end program execution.

General form

END

The execution of this instruction causes the Computer to end program execution and display the prompt symbol. When you have multiple programs stored in the Computer, use END at the end of each program to prevent one program from flowing into the next one in sequence.

12. BEEP statement

The BEEP statement is an instruction to force the Computer to make a beep sound.

General form

BEEP (Expression)

Example:

BEEP 10

BEEP A

The Computer beeps the number of times defined by the value of \langle expression \rangle . (This value is effective only in its positive integral part.)

13. CLEAR statement

The CLEAR statement is an instruction to clear all data memories: fixed and flexible memories.

General form

CLEAR

NOTE: Program and reserve memories are protected.

14. DEGREE, RADIAN, GRAD statements

These statements are instructions to specify the unit of angle for the input of trigonometric functions (SIN, COS, TAN) and for the output of inverse trigonometric functions (ASN, ACS, ATN).



(1) DEGREE

The statement sets the Computer's unit of angle calculation to the degree mode.

General form

DEGREE

(2) RADIAN

The statement sets the radian mode.

General form

RADIAN

(3) GRAD

The statement sets the grad mode.

General form

GRAD

$$90^{\circ} = \frac{\pi}{2}$$
 [rad] = 100^{9}

15. AREAD statement

The AREAD statement is an instruction to automatically store numerical value, the value of (expression) or "character" in a specified variable that has been displayed before the start of program execution. This instruction is operational only in the DEF mode.

General form

AREAD [Variable]

Example:

AREAD A

AREAD A\$

This instruction is skipped, if not present at the head of a definable program.

Example: Compound-interest computation program.

Writing

Programming	Note
10: "A": AREAD 20: = /100	Inputting of interest rate (%)
30 : END 40 : "S" : AREAD N 50 : END	Inputting of term
60: "D":AREAD P 70:END	Inputting of principal
80: "F":F=P*(1+1)^N 90:PRINT F 100:END	Computation of principal plus interest Display of principal plus interest

Execution

Operation	Display	Note
Set to the DEF mode		
6.8 SHFT A	>	Interest rate 6.8%
4 SHFT S	>	Term 4 years
5000 SHFT D	>	Principal DLS 5,000
SHFT] F	6505.115547	Principal plus interest
5 SHFT S	>	Term changed to 5 years
SHFT F	6947.463404	Principal plus interest
SHEIJ P	0947.403404	Principal plus interest

16. REM statement

The REM statement is not an execution statement, it is a handy way to add notes in a program for reference. The program execution skips the notes, or REMarks that follows this instruction, going onto the following line.

General form

REM (Note)

Use this statement when you want to insert lines or space between programs for dividing them clearly (and yet have no effect on their execution).

Example:

80 : REM ★ OUTPUT PROGRAM ★

COMMAND STATEMENTS

In addition to program execution statements, the TRS-80 Pocket Computer can process instructions capable of starting program execution or displaying program contents. These instructions are called commands. These commands are not executed until you press the well key.

1. RUN command

The RUN command functions only in the RUN or DEF mode. Use it to start program execution.

General form (1) RUN EMER

This form starts program execution at the first line of a program.

General form (2) RUN (Exepression)

Example: RUN 30 EMER

This form starts program execution at the line specified, or by the value of \langle expression \rangle . That value is effective in its integral part, limited to 1 through 999.

Example:

R U N 10 ENTER

Program execution begins at line 10.

General form (3)

RUN ("Character" [Character variable]

Example:

RUN "ABC"

This form starts the program execution at the line given a label such as is stored in "character" or [character variable].

When the length of "character" and label exceeds seven characters, only the first seven characters are used and excess is ignored.

Example:

R U N SHFT II P R O - 1 SHFT II ENTER

Program execution starts at the line labeled "PRO-1".

- If you use this command without a program, the Computer will merely return a prompt (>)
- When the specified line does not exist in general form (2) or when the specified label does not exist in general form (3), an error (Error 2) occurs.

2. DEBUG command

The DEBUG command functions only in the RUN or DEF mode. It can be used in the same form as RUN. However, when you use this command to execute a program, the Computer displays the line number as it executes each line and then goes into a break condition (temporary stop).

Then, when you press the T key, the Computer will advance to the next execution line and display its line number, going into break again. (Such a line-by-line execution is called debugging and gives you an opportunity to debug [correct errors] and/or study the program line-by-line.)

Note: For program debugging, consult page 41.

The general form of this command can be defined in the same manner as the RUN statement.

3. CONT command

The CONT command functions in the RUN or DEF mode. It clears a temporary stop of program execution and CONTinues program execution.

General form

CONT EMER

Various forms of "temporary stop" of program execution are described below:

- (1) Temporary stop due to STOP statement during program execu-
- tion.

 (1) Break condition

 (2) Temporary stop caused by pressing ON (BREAK) key during program execution.

 (3) Temporary stop accompanied by the display of a line number
 - during debugging.
- (2) After the execution of a PRINT statement (while specified contents are displayed)

Example:

10:A=0

20:FOR B=1TO 3

30:A=A+B:PAUSE B. A

40:NEXT B

50: END

Operation		Display		Note
Set to the RUN mode DEBUG DEBUG FATER I	DEBUG_ 10: 20:	1.	1.	
C O N T	30: 40: CONT_	2. 3.	3. 6.	Inputting a CONT command Execution of the CONT command (continuing after temporary stop)

4. LIST command

This command lists a program; functions only in the PRO mode.

General form (1) LIST EMER

This form displays the first line of a program.

General form (2) LIST (Expression)

Example: LIST 10

This form displays the program line specified by the value of (expression). (The value is operative only in its positive integer part, limited to 1 through 999.)

General form (3) LIST { "Character" | [Character variable] }

Example: LIST "ABC"

This form displays the program line with the label identification stored in "character" or [character variable].

When the length of "character" and label exceeds seven, only the first seven characters are used, any excess is ignored.

Example:

10:A=0

20:FOR B=1TO 3

30:A=A+B:PAUSE B. A

40:NEXT B

50:END

Operation	Display	Note
Set to the PRO mode		
LIST	LIST_	
ENTER	10:A=0	Display of the first line
LIST30	LIST30_	
. ENTER	30:A=A+B:PAUSE B,A	Display of line 30

- Recall an arbitrary line by LIST and then you can display preceding and following lines using the 1 or 1 key.
- When programs use more than 24 characters on one line, they are displayed beginning with the first number/character on the left. To display the remainder of the line, use key.
- When the specified line does not exist an error (Error code: 2) occurs.

5. NEW command

The NEW command clears all programs, reserve programs and data (but not reserve memories).

General form

NEW EMER

(1) DEF, RUN and PRO modes

The execution of a NEW command in these modes clears <u>all</u> program and data memories. (but not reserve memories)

(2) RESERVE mode

The execution of a NEW command in this mode clears all reserve memories (but not program and data memories).

• The prompt symbol appears after execution of this command.

6. MEM command

This commmand displays the number of program steps and flexible memories, so you can tell how much memory you have used up and how much you have available.

General form

MEM ENTER

This command functions in all modes.

Example: The execution of a MEM command with all program memories cleared.

Ope	eration		Display	Note
PRO mode				
	N E W ENTER	>		
	M E M ENTER	1424STEPS	178MEMORIES	*

* The displays shows that you have space for 1424 steps or that a maximum of 178 memories can be used as flexible memories.

One flexible memory corresponds to 8 steps of program.

Thus, if you load a program with 8 steps or less, the number of flexible memories will be reduced by one (if a program uses 9 through 16 steps, that takes up two flexible memories, etc.).

The displayed number of memories does not include the 26 fixed memories.

73

STATEMENTS FOR OPTIONAL CASSETTE INTERFACE (Cat. No. 26-3503)

You can use your TRS-80 Pocket Computer along with a cassette tape recorder as an external memory storage unit by using the optional Cassette Interface 26-3503. This will enable you to record programs, reserve programs and the contents of data memories stored in the Computer on to a magnetic cassette tape. Also, you can read them out of tape, as well as compare the contents recorded on the tape with the contents loaded in the Computer.

Giving file names to all recordings (programs, reserve programs and data) the Computer provides an automatic search when reading them out.

For instructions on operating the tape recorder, refer to page 93.

1. CSAVE (Cassette save) statement

The CSAVE statement is an instruction to record programs or reserve programs on a magnetic tape. This statement can only be executed manually.

General form: CSAVE "File name" [MIR]

If the length of file name is more than 7 characters, the excess is ignored.

This is true of all magnetic tape control instructions.

In DEF, RUN and PRO modes

The CSAVE instruction commands the Computer to first record the specified file names on a magnetic tape and then the entire stored program identified by that file name.

However, if the memory has no programs, the prompt symbol appears on the display.

Example: PRO mode

CSAVE "PROG .-1" EMER

"PROG.-1" is recorded on tape as the file name,

plus all the identified program lines.

In RESERVE mode

The CSAVE instruction forces the tape recorder to record specified file names and then all the reserved programs.

However, if the memory has no reserve programs, the display shows the prompt symbol.

Example: RESERVE model

"RESRV-1" is recorded as the file name along with

CSAVE "RESRV-1" even all reserve programs.

By executing a CLOAD? statement (mentioned later on) after executing a CSAVE statement you can check that programs have been accurately recorded.

Note:

You must avoid recording programs given the same file name — but different in contents — on the same side of the same tape, otherwise the reading (transferring) of wrong contents may occur in the execution of a CLOAD or CHAIN statement. Do not record programs with the same file-names on the same side of the tape. (Or you may end up with the incorrect data or program.)

Also do not allow program recordings to overlap (even slightly); either or both programs may be full of errors.



2. CLOAD (Cassette Load) statement

This statement is an instruction to transfer (load in) programs or reserve programs from a magnetic tape into the Computer. This instruction can only be executed manually.

When transferring programs, rewind the tape to the portion of tape where they are recorded, then execute this instruction.

General form

CLOAD "File name" ENTER

In DEF, RUN and PRO modes

This instruction makes an automatic reference of specified file names and transfers the corresponding programs from the magnetic tape to the Computer.

Example: PRO mode

CLOAD "PROG .- 1" INTER

A program on the magnetic tape whose file name is "PROG.—1" is found and transferred to the program memory.

In RESERVE mode

This instruction makes an automatic reference of specified file names and transfers the corresponding reserve programs from the magnetic tape to the Computer.

Example: RESERVE mode

CLOAD "RESRV-1" ENTER

A reserve program on the tape whose file name is "RESRV-1" is found and transferred to the reserve memory.

- Note 1. The Computer cannot decide whether a certain file name refers to a program or reserve program. Therefore, an improper mode selection leads to an improper transfer: reserve programs to the program memory or programs to the reserve memory.
 - 2. If file names you specify are not on the magnetic tape, the Computer continues to search for the absent file names even after the tape has come to an end. (In this case, cancel the instruction by pressing the ON key.)

This is also true of CLOAD?, CHAIN, and INPUT # statements described later.

3. If an error is encountered during the transfer of programs, only the program memory is cleared. This is also true of a CHAIN statement (discussed later).

3. CLOAD? (Cassette Load?) statement

The CLOAD? statement is an instruction to check the contents of the program or reserve memory inside the Computer with the recording on the magnetic tape that shares the specified file name. This instruction can only be executed manually.

If the above check is not good, an error (error code: 5) occurs.

(When making a CLOAD? check, rewind the tape to the portion of the tape that is to be checked, then execute this instruction.)

General form CLOAD? "File name"

In DEF, RUN and PRO modes

This instruction checks the contents of program memory against the recorded programs on the magnetic tape (specified file name only).

In RESERVE mode

This instruction checks the contents of reserve memory against the recorded programs on the magnetic tape (specified file names only).

When the program memory is loaded with nothing in the DEF, RUN or PRO mode or when
the reserve memory is loaded with nothing in the RESERVE mode, the execution of a
CLOAD? statement will display only the prompt symbol.

4. CHAIN statement

The CHAIN statement is a program execution instruction. When the Computer comes to this instruction during program execution, it automatically searches programs recorded on a magnetic tape for the specified file names and transfers those programs to its program memory.

With the CHAIN statement it also starts execution of the tranferred programs at the line specified.


In other words, if you use this instruction, even programs long enough to exceed the capacity of the Computer's program memory can be read out to the Computer in sequence to be executed. These programs of course must be divided in some manner so they can be stored individually in the Computer's memory (while execution takes place).

(Rewind the tape and then execute specified programs.)

General form (1) CHAIN "File name"

Example: CHAIN "PRO-1"

The instruction tells the Computer to execute a transferred program from the beginning.

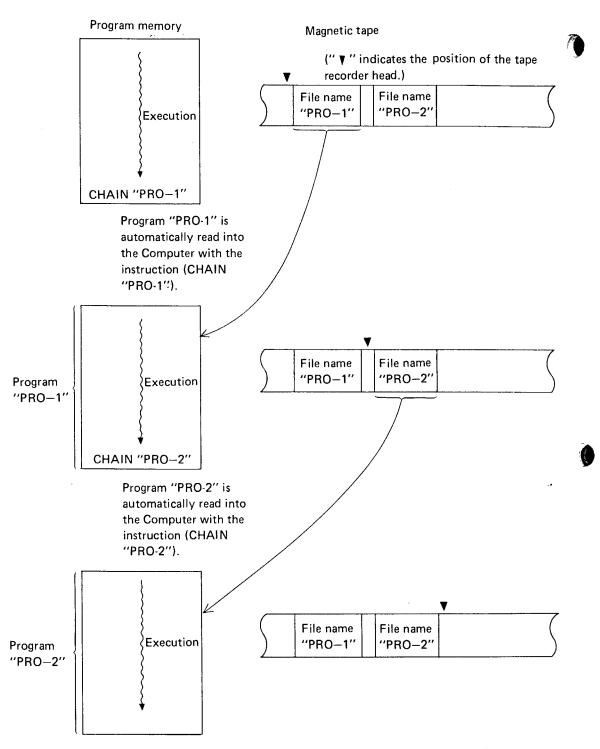

If each program is arranged to end with a CHAIN statement as shown above, a new program can be automatically transferred from the tape and executed in succession every time the preceding program is completely executed.

General form (2) CHAIN "File name", (Expression)

Example: CHAIN "PRO-1", 30

This form starts the execution at the line specified by the value of (expression) contained in a transferred program.

The value of (expression) is effective only in its integer part, limited to positive numbers from 1 through 999.

General form (3) CHAIN "File name", { "Character" [Character variable]

Example: CHAIN "PRO-1", "A"

This form starts the execution at the line given the same label as the contents of "character" or [character variable] contained in a transferred program.

The length of "character" or label is effective up to seven characters (excess is ignored).

Example:

A program given file name "ABC" is transferred from the magnetic tape to the program memory,

100 : CHAIN "ABC" and is executed from its beginning.

Example: A program given file name "XYZ" is transferred

from the magnetic tape to the program memory and

200 : CHAIN "XYZ", 10 executed from line 10.

5. PRINT # (Print cross-hatch) statement

The statement PRINT # is an instruction to record the contents of data memories on a magnetic tape. This statement can be executed both by program and manual operation. (Executable in the DEF and RUN modes)

General form (1) PRINT # "File name"

Example: PRINT # "DATA 1"

This form tells the Computer to record "file name" and then record all the contents of data memories in sequence starting with fixed memory A (or A\$).

General form (2) PRINT # "File name"; [Label of variable]

Example: PRINT # "DATA 1"; A(5)

This form commands to first record file names on a magnetic tape and then record the contents of specified data memory.

The [label of variable] is specified by characters A through Z or in the form of A (). In the latter case, however, material in parentheses is limited to positive integers from 1 to 204, or to fixed memories. (If program memories loaded with program are specified as flexible memories, an error occurs.)

This method of specification also applies to the INPUT # statement described below.

A PRINT # statement must always end with [MTD], when executed manually.

Frample: Manual execution "DATA-1" is recorded as file name, and the

Example: Manual execution "DATA-1" is recorded as file name, and the contents of data memory no. 1 (memory A or PRINT # "DATA-1" [event] A\$) and all subsequent that can be specified as

flexible memories are all recorded in sequence.

Program execution "DATA-1" is recorded as file name, and the contents of data memory no. 26 (memory Z or Z\$) and all following are recorded in sequence.

150 : PRINT # "DATA-1"; A(26)

Example:

6. INPUT # (Input cross-hatch) statement

The INPUT # statement is an instruction to transfer data recorded on a tape to the data memory of the Computer. This statement can be executed both by program and manual operation. (Executable in the DEF or RUN mode)

(Rewind the tape before executing this instruction.)

General form (1) INPUT # "File name"

Example: INPUT #"DATA 1"

This form commands the Computer to automatically search for specified file names and loads data memory no. 1 (A or A\$) and all following, in sequence with the corresponding recorded data.

General form (2) INPUT # "File name"; [Label of variable]

Example: INPUT # "DATA 1"; A(5)

The form compels the Computer to search for specified file names automatically and loads the data memory specified by [label of variable] and the following, in sequence, with recorded data corresponding to the specified file names.

Example: Execution through manual

operation

INPUT # "DATA-1" EMER

Recorded data whose file name is "DATA-1" is put in data memory no. 1 and all after in

sequence.

Example: Execution through program

Recorded data whose file name is "DATA-1" is put in date memory no. 26 and all after in sequence.

50 : INPUT # "DATA-1"; A\$(26)

• The Computer can distinguish and transfer file names recorded as programs and as data even if they are identical.

Note: If the number of recorded data is smaller than that of data memories to be loaded, the execution activated by the INPUT # statement ends as soon as all the data are transferred.

Also, all data will be transferred until all the data memories are loaded, and then execution will end even if there is more data.

RESERVABLE KEY

Up till now we've only discussed how to program one key at a time. But the Pocket Computer has a very powerful feature which allows you to use just one key for an entire program or function which you use frequently. The reserved key function can be used for manual calculations as well as
in programs. For example, you assign PRINT to the A key for reserve, all you have to do is
1 0. 0.00
press SHFT A to have the Computer print the required data.
The following keys are available for reserve:
A , S , D , F , G , H , J , K , L , Ξ , Z , X ,
C V B N M SPC
1. Reserve memory for reservable keys
The total numbers of steps allocated for reservable keys are 48. If the contents of one or more reservable keys exceed 48 steps, error 4 (insufficient memory) occurs.
To write reserve programs, select the RESERVE mode and follow the same procedures as in manual calculations.
(1) Preparation Before writing a new reserve program clear the reserve memory using a NEW command. However, if you are writing reserve programs to follow in sequence one or more already written, there is no need to use NEW.

[Precedures]

- (1) Select the RESERVE mode.
- (2) N E W ENTER

NEW clears the entire reserve memory.

(2) Writing

Example:

Reserve the following key operation:

"COS" to A

"A * A + B * B" to S

"RUN 130" to Z

Writing

Operation	Display	Note
Set to the RESERVE mode		
N E W ENTER	Colon is displayed automatically.	Reserve memory is cleared.
SHFT	A:_	Key is specified.
COS	A:COS_	Input
ENTER	A:COS	Writing (the cursor disappears)
SHFT S	S:_	Key is specified.
A * A + B * B	S: A*A+B*B_	Input
ENTER	S:A*A+B*B	Writing
SHFT Z	Z:_	Key is specified
R U N 1 3 0	Z:RUN130_	Input
ENTER	Z:RUN 130	Writing

• When the reserve memory (48 steps) is full, pressing the [ENTER] key causes an error. (Error code: 4)

2. Use of reservable keys

The reservable keys are used in the PRO or RUN mode.

Example 1: Manual calculation by using the reservable keys to which reserve programs have been assigned programs as written above.

Operation	Displa	зу	Note
Set to the RUN mode.			
Set the angular mode to DEG			Degree is specified.
SHFT A	cos _		
60	COS 60_		
ENTER		0.5	
A = 32 SHFT •	A=32,_		
B = 53 ENTER		53.	
SHFT	A*A+B*B_		
ENTER		3833.	$32^2 + 53^2 =$

81

Example 2: Writing and execution using the reservable keys as assigned above.

Operation	Display	Note
Writing		Law of cosine
Set to the PRO mode	· · · · · · · · · · · · · · · · · · ·	$=\sqrt{a^2+b^2-2ab\cos\theta}$
130 I N P U T	130 NPUT_	
A SHFT , B	130 INPUTA,B_	
SHFT 9 D ENTER	130: INPUT A,B,D	
140 C = 🕶 C	140C=√(_	•
SHFT S	140C=√ (A*A+B*B_	Recall of reserve
-2 * A *	140C=√(A*A+B*B-2*A*	
B * SHFT A	$0C = \sqrt{(A*A+B*B-2*A*B*COS}$	Recall of reserve
D) EMER	140:C=√(A*A+B*B-2*A*B*	
150 P R I N T	150PRINT_	
C ENTER	150: PRINT C	
160 E N D EMER	160:END	
Execution		
Set to the RUN mode		
Set the angular mode to DEG		
SHFT, Z	RUN130_	Program execution
ENTER	የ	starts.
(When A = 10) 10 EMER	?	
(When B = 12) 12 EMTER	?	
(When D = 60) 60 EXTER	11. 13552873	

Operation	Display	Note
Set to the RUN mode		
5 * 6 * 60	5*6*60_	
SHFT INS	5*6* 5 60	Adding one space
SHFT A	5*6*COS 60	COS is inserted as 1-step instruction.
SHFT [INS SHFT [INS	5*6*22COS 60	Two-step space
SHFT. S	5*6*A*A+B*BCOS 60	When the number of reservable key steps to be inserted is larger than the codes, the necessary number of steps are secured to insert the remaining code.
*	5*6*A*A+B*B*60	
SHFT		
SHFT INS SHFT INS	5*6*A*A+B*B*###60	Three-step space
SHFT A	5*6*A*A+B*B*COS CC60	When the number of reservable key steps to be inserted is smaller than the insertion codes, the empty insertion codes are filled with nothing.

3. Checking reserve programs

To check what information is assigned to reservable keys, specify those keys in the RESERVE mode.



Example: Checking reserve programs written in A , S , D and Z as above.

Operation	Display	Note
Set to the RESERVE mode		
SHFT	A:COS	Display of reserve.
SHFT	S:A*A+B*B .	Display of reserve.
SHFT	D:_	When nothing is reserved
SHFT Z	Z:RUN 130	Display of reserve

4. Correction of reserve programs

If you need to correct written reserve programs or use different key operations:

Example: "A: COS", "S: A * A + B * B" and "Z: RUN 130" as reserved above are to be changed to "A: SIN", S: LOG A" and "Z: RUN 50."

Operation	Display	Note
Set to the RESERVE mode		
SHFT A	A:COS	Recall of reserve
	A:COS	Recall of cursor
SIN	A:SIN_	Inputting through keys
ENTER	A:SIN	Writing
SHFT S	S:A*A+B*B	Recall of reserve
•	S:A*A+B*B	Recall of cursor
LOGA	S:LOGAB*B	Inputting through keys
SPC SPC SPC	S:LOGA _	Unnecessary instructions are cleared by spacing.
ENTER	S:LOG A	None of spaces are written in the reserve memory.
SHFT	Z:RUN 130	Recall of reserve
▶ ▶	Z:RUN 130	The cursor moves
5 0 SPC	Z:RUN 50 _	Inputting
ENTER	Z:RUN 50	Writing


5. Deleting reserve programs


(As you know, NEW key clears all reserve memories, but here is how you delete just one.)

Example: To delete "RUN 50" reserved for Z.

Operation		Display	Note
Set to the RESERVE mode			
SHFT Z	Z:RUN	50	Recall of reserve
.	Z:RUN	50	Recall of cursor
SPC	Z: 50	•	All instructions are
SPC SPC	Z: _		freplaced with spaces.
ENTER	>		Reserve is deleted and prompt symbol appears.

6. Configuration of reserve programs

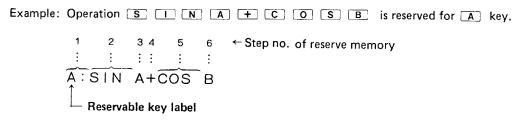

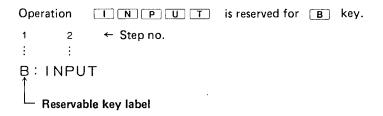

The labels of keys are also placed in reserve memory (such as A and B), each of which takes 1 step of space. (Colons after key labels are not placed in the reserve memory.)

ERROR CODES

If you attempt to execute statements or programs which the Computer cannot process (such as words not defined by the Computer or incorrect operations) an error will occur. The Computer displays an error code and stops execution.

Example 1

Opera	tion	Display
RUN mode		
	5 + * 3 5+*3	-
	ENTER	1
	▶ 5+¥3	

In this example, \star results in a syntax error (improper computer "grammar") which produces the error symbol.

If you press the or key, the input contents will be displayed with the cursor positioned at * (where the error occurred).

Example 2

30: A = 5 + *3

:

Operation		Display			
RUN mode	<u> </u>	Line number 30: 30: A=5+*3	Error code 1		

In :	this	case,	the Computer	displays	the	line	number	where	the	error	occured.	along	with	an	error
cod	le.										,	J			

If you press the <u>t</u> key, the position where the error occurred is marked by the cursor; the display will remain only while you hold down <u>t</u> key. (When you release <u>t</u> the prompt symbol (>) will appear.)

To correct this error, press the MODE key to select the PRO mode and press the I or I key to display the program for correction.

To clear an error in manual operation, use the ON or CL key. For other errors (except for exceeding program memory capacity and error code 5) you can also use the or keys. If you encounter an error during program execution, clear using the ON, CL or keys. (An error encountered during the execution of a CHAIN statement cannot be cleared using the key.)

Table of Error Codes

Error code	Nature	Description
1	 Grammatical (syntax) error Operational error Error in memory specification 	 Occurs when the absolute value of a calculation result exceeds 1 x 10¹⁰⁰, or when the divisor is 0. Occurs when memories to which numerical values are assigned are specified as character variables or vice versa.
2	Line error	 Occurs when lines and labels specified by GOTO, GOSUB, RUN, DEBUG or LIST statements do not exist.
3	Level Error	 Occurs when the level exceeds 4 stages in a GOSUB statement or FOR-NEXT statement. Occurs when you try to execute a RETURN statement without a preceding GOSUB statement. Occurs when you try to execute a NEXT statement without a mating FOR statement.
4	Insufficient memory	 Occurs when you try to write programs with more steps than the remaining available program memories. Occurs when you try to write more reserve programs steps than can fit the available remaining reserve memories. Occurs when existing dimension memories are specified and there is insufficient memory left.
5	Control error of magnetic tape	Occurs when an error occurs during the execution of magnetic tape control instruction. (Verify error, check-sum error, etc.)
6	Error in format	Occurs when a display of numerical data is not in specified format when used with PRINT or PAUSE.

APPENDIX

The remainder of this Manual includes reference information for your TRS-80 Pocket Computer.

SPECIFICATIONS

Model:

TRS-80 Pocket Computer

Number of calculation digits:

10 digits (mantissa) + 2 digits (exponent)

Calculation system:

According to mathematical formula (with priority judging func-

tion)

Program system:

Stored system

Program language:

BASIC

Capacity:

Program memory;

1424 steps maximum 26 Fixed memories

Data memory;

178 Flexible memories, maximum (shared

with program memory)

Reserve memory;

48 steps maximum (up to 18 different

reserve programs)

Input buffer;

80 characters

Stack:

For data:

8 steps

For function;

16 steps (in parentheses, 15 levels)

For subroutine:

4 levels

For FOR-NEXT

statement;

4 loop-levels

Calculations:

Four arithmetic calculations, power calculation, trigonometric and inverse trigonometric functions, logarithmic and exponential functions, angular conversion, extraction of square root, sign function,

absolutes, integers, and logical calculations.

Editing function:

Cursor shifting (> -1)

Insertion (INS) Deletion (DEL)

Line up and down (I, 1)

External memory function:

By using the optionally available TRS-80 Cassette Interface (26-

3503), program, reserve program, and data memory can be record-

ed or read out to or from magnetic tape (tape recorder).

Memory protection:

CMOS battery back-up

(program, data and reserve memories are protected)

Display:

24-digit alphanumeric dot matrix liquid crystal display

Component:

CMOS LSI, etc.

Power supply:

5.4V, DC:

4 mercury batteries (Type 675, Radio Shack Cat. No. 23-1521)

Power consumption:

5.4V, DC: 0.011W

5.4V, DC: 0.013W (with Cassette Inteface)

Operating time:

Approx. 300 hours on mercury batteries (Type 675)

ambient temperature: 20°C (68°F).

The operating time changes slightly depending on the type of

battery and usage.

Operating temperature:

 0° C ~ 40° C (32° F ~ 104° F)

Dimensions:

175(W) x 70(D) x 15(H) mm

6-7/8"(W) x 2-3/4"(D) x 19/32"(H)

Weight:

Approx. 170g (0.37 lbs.)

Accessories:

Carrying case, four mercury batteries (built-in), two keyboard

templates.


BATTERY REPLACEMENT


When the battery indicator is not lit (upper right hand corner of display), replace the mercury batteries (type 675).

- 1. Turn off the Computer.
- 2. Remove the screws from the back cover with a small screw driver (Fig. 1). (Note that two types of screws are used.)
- 3. Replace the batteries as shown in Figure 2.
- Use a dry cloth to wipe off the surface of the new batteries before installing.
- Always replace all 4 batteries at the same time.

Batteries are available from your local Radio Shack store, Cat. No. 23-1521

- 4. Hook the tabs of the back cover into the slots on the Computer.
- 5. Push the back cover in slightly while replacing the screws. (Fig. 3)
- 6. Push the Reset switch on the back cover to clear the Computer. (Fig. 4) Use a ball-point pen to press the Reset switch.
- 7. Press the OFF and ON keys to clear the Computer. When the batteries are correctly intalled ">DEG RUN · "will be displayed.

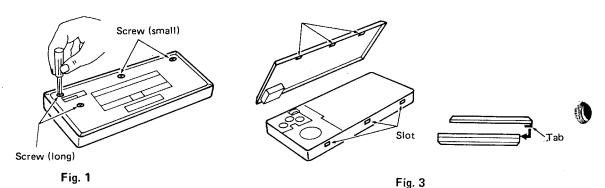

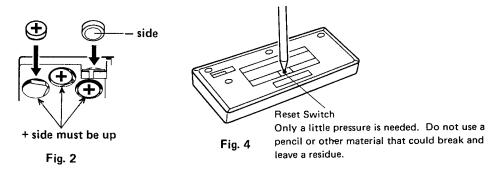

NOTE: Do not dispose of batteries in a fire.


IMPORTANT: The batteries must be of specified type (675). When other type, such as 675E batteries are used, the display operation will become improper.

CONNECTING THE CASSETTE INTERFACE

You can obtain the optional Cassettle Interface for the Pocket Computer by ordering Cat. No. 26-3503. Using this Casstte Interface will allow you to store programs and data from the Pocket Computer onto standard cassette tapes (of course you'll also need a Cassette recorder such as we sell for this Pocket Computer system -- check with your local Radio Shack store). Once on tape, you can load these programs and data back into the Computer with a simple procedure.

Replacing the Batteries

If Remote countrol of the Cassette recorder is not functioning normally when using the Cassette Interface, it's time for fresh batteries.




Three "AA" penlight cells.


- Notes: Once a year you should replace the batteries in the Cassette Interface. Use only the Alkaline type (they maintain their voltage for a longer period of time).
 - Always replace all three batteries at the same time.
 - Never leave weak or dead batteries in any battery-operated device (they can leak damaging chemicals). If you are not going to use the Interface for a month or more, remove the batteries.

Connecting the Pocket Computer to the Cassette Interface


- 1. Turn off your Pocket Computer by pressing OFF key.
- 2. Remove the cover from the left side of your Computer, and snap it into place on the bottom of the Cassette Interface.

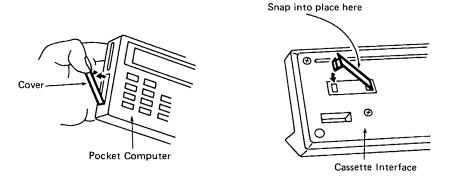

3. Fit projecting parts on the Cassette Interface in the grooves of the Computer as shown below.




4. Slide the Pocket Computer carefully to fit securely onto the Cassette Interface (match triangular marks (▲) on the Computer and Cassette Interface).

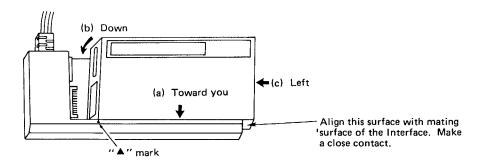

5. If parts do not mate properly, do not force. Carefully shift Computer left or right to be sure all mating surfaces are correct.

Note: Before attaching or removing the Computer from the Interface, be sure to turn off the Computer with the OFF key. If the Computer is connected or disconnected with power ON, all keys may be inoperative. In this case, press the ALL RESET switch on the bottom of the Computer. This will clear the entire Computer.

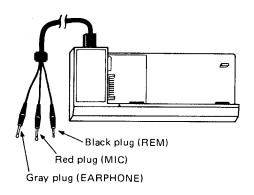


Connecting the Cassette Interface to a Tape Recorder

Only three connections are necessary:

- 1. Connect red plug into the MIC jack on the Cassette Recorder.
- 2. Connect gray plug into the EArphone jack on the Recorder.
- 3. Connect the black plug into the REMote jack on the Recorder.

While most Cassette Recorders can be used for Recording and Playing back programs and data for the TRS-80 Pocket Computer, we urge you to use one of the Recorders we recommend (such as our CTR-80A or Minisette-9).

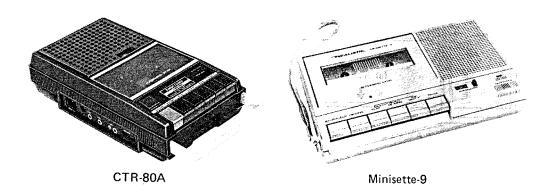

OPERATING THE CASSETTE INTERFACE & RECORDER

Recording onto magnetic tape

See Tape Notes on page 101.

- 1. Enter a program or data into the Computer.
- 2. Load tape into the tape recorder.

Determine the position on the tape where you want to record the program.

- When using a tape, be sure the tape moves past the clear leader (non-magnetic mylar material).
- When using a tape already partially recorded, search for a location where no recording is.
- Connect the Interface's red plug to the tape recorder's MIC jack and the black plug to the REM jack.
- 4. Simultaneously press record and play buttons on the tape recorder (to put it in record mode). (The tape recorder will be stopped.)
- 5. Input recording instructions (CSAVE statement, PRINT # statement), and press the key for execution. (For CSAVE and PRINT # see pages 74 and 78.)

To record the program:

First press the wood key to set the unit to "RUN" mode (or "DEF" mode). Next push the following keys: C S A V E SHFT IT FILE NAME SHFT IT EMER.

(To write the contents of data memory onto tape, push as follows;

		SHFT # ENTER .)
Eg.	"RUN" mode	C S A V E SHFT II A A SHFT II ENTER

When you press the key, tape motion will begin, leaving about a 6-second none-signal blank. (Beep tone is recorded.) After that, the file name and its contents are recorded.

 When the recording is complete, the PROMPT symbol (>) will be displayed and the tape recorder will automatically stop. Now you have your program on tape (it still is in the Pocket Computer also).

When data is to be automatically recorded by program execution (PRINT # statement, not manual operation), set up steps 1 thru 4 before executing the program.

To aid you in locating programs on tapes, use the tape counter on the recorder.

Loading from a magnetic tape

See Tape Notes on page 101.

To load, transfer, or read out programs and data from magnetic tape into the Pocket Computer, use the following procedure.

- 1. Load tape in the tape recorder. Position tape just before the portion to be read out.
- 2. Connect the gray plug to the EAR jack on the tape recorder, and the black plug to the REM jack jack.

[In using a tape recorder having no REM terminal, press the PAUSE button to make a temporary stop.]

3. Push the PLAY button on the tape recorder (to put unit in playback mode). (The tape should be stopped.)

Set the VOLUME control to 6 to 8.

Set Tone to maximum treble (10).

4. Input transfer instructions (CLOAD statement, INPUT # statement), and press execution. (See pages 75 and 79.)

To transfer the program:

Put the unit into "RUN" mode (or "DEF" mode) with the MODE key. Then push the following keys; C L O A D SHFT II FILE NAME SHFT II MODE. (To load the contents of the data memory, push as follows; I N P U T SHFT II MODE.)

Eg, "RUN" mode C L O A D SHFT II A A SHFT II ENTER

The specified file name will be automatically searched for and its contents will be transferred into the Pocket Computer.

5. When the program has been transferred the Computer will automatically stop the tape motion and display the PROMPT (>) symbol.

To transfer data (CHAIN statement, INPUT # statement) in the course of execution of a program, set up steps 1 thru 3 prior to executing the program.

- Notes: If an error occurs (error code "5" is displayed), start over from the beginning. If the error continues, adjust volume up or down slightly.
 - If the error code is not displayed but tape motion continues (while the Pocket Computer displays the symbol "RUN"), transferring is improper. Press ON key (to "break") to stop the tape. Repeat steps.
 - If the error remains or the tape continues to run after several attempts to correct the problem, try clearning and demagnetizing the Recorder's tape head (see Recorder's Owners Manual).

Program Verification

See tape Notes on page 101.

After loading or transferring a program to or from tape, you can verify that the program on tape and program in the Pocket Computer are identical (and thus be sure that everything is OK before continuing your programming or execution of programs).

- 1. With cassette in the recorder, operate the tape motion controls to position tape at the point just before the appropriate file name to be checked.
- 2. Connect gray plug to EARphone and black plug to REMote jacks.
- 3. Press PLAY button of recorder.
- 4. Input a CLOAD? statement and start execution with wey. Do this as follows: Press key to set unit to "RUN" (or "DEF" mode).

Enter the following key sequence -

C L O A D SHFT ? SHFT II A A SHFT II ENTER


The Pocket Computer will automatically search for the specified file name and will compare the contents on tape with the contents in memory.

If the programs are verified as being identical, a prompt symbol will be displayed on the Pocket Computer.

If the programs differ, execution will be interrupted and an Error code 5 will be displayed. If this occurs, try again.


Editing Programs on Magnetic Tape

You can use the Pocket Computer to Edit and merge Programs on tape by using the CLOAD1 statement.

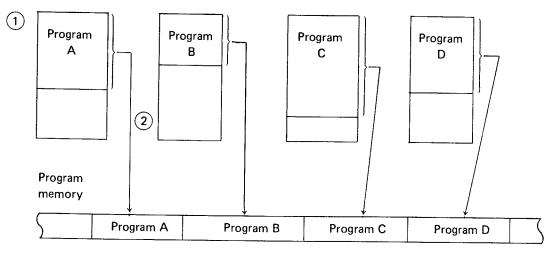

Magnetic tape

- \bigcirc
- 1) Write each program into the Computer.
- 2 Save each program onto magnetic tape.

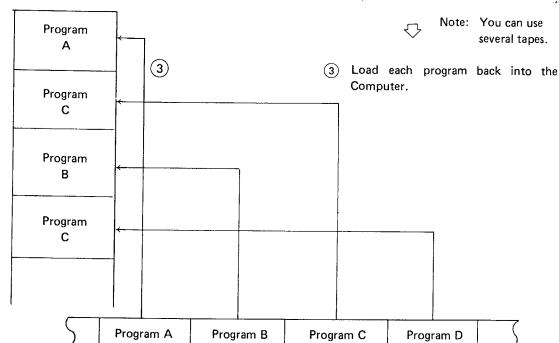

CLOAD 1 statement

This statement is an instruction to transfer (load) programs from magnetic tape into the Computer. The program from magnetic tape is loaded into the program memory in addition to programs already stored in the Computer.

General form CLOAD 1 "File name" ENTER


1. DEF, RUN and PRO mode

The CLOAD 1 instruction automatically references specified file names and transfers the corresponding programs from magnetic tape into the Computer's program memory, along with programs already stored in memory.

Example: PRO mode

CLOAD 1 "PROG-2" EMER

Contents of the program memory

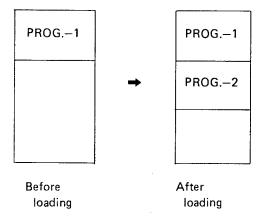

2. RESERVE mode

Same as for CLOAD statement.

• When the statement "CLOAD 1" is entered with the key, the statement is converted to a 2-step code. When the statement is recalled, one space is automatically displayed between "CLOAD" and "1".

The abbreviation for "CLOAD 1" is "CLO. 1" or "CLOA. 1".

Editing and execution of multi-program forms

The line numbers of each program must be arranged in numerical order.

The following example will help to explain this function.

e:	5 AAA	
	20 GOTO 500	
	30 A B A	
	:	
	100 GOTO 30	
File name 'PROG-1" →	i i	
	200 GOSUB A C A :	u
	:	
	300 A = 100	
	10 A D A	
	20 GOTO 5	
	30 ▲ C ▲: RETURN	
File name	:	
'PROG-2" →	100 GOTO 30	
	:	
	200 GOTO A B A	
	:	
	500 END	.,

Program correction

You can insert or delete a program line in the final program only. In the above example you can only edit or correct parts of "PROG.—2" program.

	•
	•
	•
	•
100 GOTO 30	
	•
	•
	· •, ·
150 PRINT A,	В
	•
	:
200 GOTO "B"	
	•
	:
500 END	

Checking the program

Set the Computer in PRO (program) mode.

- 1. LIST (Expression) EMER
- Displays the starting program line corresponding to the contents of the \(\) expression \(\) by searching all the program lines from the starting point of the program presently stored in memory.
- An error (error code: 2) will occur when the program has no program line corresponding to the contents of (Expression), or when the contents of (Expression) is smaller than the line number at which program search begins.

Key opration	Display
LIST 30 ENTER	LIST 30_
	30 : "B"
LIST 500 ENTER	LIST 500_
	500 : END
LIST 10 ENTER	LIST 10
	2

2. Display of the next or preceding program line by pressing the T or t key during program line display.

Key operation	Display	Note
	30 : "C" : RETURN	
t	20 : GOTO 5	
1	10 : "D"	
1	300 : A = 100	Preceding program
ī	10: "D"	Starting point of the next program
1	300 : A = 100	

Execution of the program

(Program execution by using the RUN and DEBUG command.) Set the Computer to the DEF or RUN mode.

RUN (DEBUG) 〈 Expression 〉 ENTER

Executes the starting program line corresponding to the contents of the \(\) expression \(\) by seaching all the program lines from the starting point of the program presently stored in memory.

Error conditions are the same as for "LIST (Expression) ENTER ".

Key operation	Execution start line	
RUN ENTER	5 A A A	
RUN 30 EMER	30 A B A	
RUN 10 EMER		Error (Error code: 2) occurs.
RUN SHFT A B SHFT A ENTER	30 A B A	
DEBUG SHFT A D SHFT A ENTER	10 A D A	

GOTO statement, GOSUB statement

- If the contents of the \(\) Expression \(\) is smaller than the program line which is being executed now, the program jumps to the desired program line by searching from the present line back to the starting point.
 - If larger, the program jumps to the desired program line by searching from the present line to the final line.
- An error (error code: 2) will occur when the program has no program line corresponding to the
 contents of (Expression), or when the contents of (Expression) is smaller than or larger than
 the line number where program search begins.

Pro	gram	Note
	→5 "A"	-
	20 GOTO 500 ₇	Jumps to line 500 of "PROG-2"
	→30 "B"	
	50 GOTO 150	Error occurs (code: 2)
"PROG1"	100 GOTO 30 J	Jumps to line 30 of "PROG.—1"
	200 GOSUB "C"_ :	Jumps to line 30 of "PROG.—2" with sub-routine.
	300 A = 100	
	10 "D"	
	20 GOTO 5—	Jumps to line 5 of "PROG.—1"
	→30 "C": RETURN	Jumps to line 200 of "PROG.—1" with sub-routine
"PROG2"		After the program jumps, it returns to the next statement.
	100 GOTO 30-J	Jumps to the line 30 of "PROG2"
	150 PRINT A, B	
	200 GOTO "B"—	Jumps to the line 30 of "PROG.—1"
	300 GOTO 7	Error occurs (code: 2)
	>500 END	

Others

The program will be executed from the starting program line after executing the final line of the preceding program.

In above example line 10 of "PROG.—2" will be executed, after ending line 300 of the "PROG.—1".

Tape Notes

- If you use a recorder other than Radio Shack's CTR-80A, you may have to remove the REM plug before you are able to operate Fast-Forward and Rewind functions. Also, other difficulties may arise with normal functions.
- Always use only the highest quality tape for program and data storage (economy grade audio type tape may not provide the proper characteristics for digital recordings). To insure best results, use Radio Shack's C-20 Cassettes, especially made for recording computer programs.
- 3. Keep the tape heads and tape handling parts clean use a cassette cleaner/degamnetizer tape to keep everything clean.
- 4. Volume level can be very important when reading in data from the recorder; make slight adjustments as required to obtain error-free data transfer. A slight adjustment either up or down may result in perfect results every time.
- 5. Tapes made on one recorder may not function well on another recorder (e.g. a recording made with a Sony unit and played back on a CTR-80A may not function without errors). Use only the same model recorder for both recording and playback (if possible, use the same unit).
- 6. Be sure all connections between the Pocket Computer and Cassette Interface are secure. And be sure the connections between Interface and Recorder are secure and dirt-free.
- 7. If problems occur when using AC power for the recorder, use battery power instead (sometimes the AC power connection also adds some "hum" to the signal which upsets proper digital recordings).
- 8. Tone control set to maximum treble (10).
- 9. Volume setting for most Recorders from Radio Shack a setting between 4 and 10 should work out well (use 7 and leave it there). Other Recorders may not have this same range; try 6 to 8. If you consistenty have problems loading programs from cassette, adjust volume up or down slightly and try again.


SOME SAMPLE USER'S PROGRAMS


We've included some sample programs for your own benefit and entertainment. They will give you just a brief idea of the types of programs which can be run on your TRS-80 Pocket Computer.

NOTE: Please do not request special custom-written programs to be provided for your own applications needs. Radio Shack does not have the facilities to provide such services.

Notes for entering program listings:

- 1. Before entering program lines, set Computer to "PRO" (program) mode and enter N E W to clear out any existing program(s).
- 2. Press at the end of each program line. This automatically forces a colon to be added after each program line (no need to add that colon).
- 3. If you want to add a blank space inside quote marks, you'll have to enter one (SPC key). However it is not necessary to add a space between commands which use two or more characters. The following examples should help you

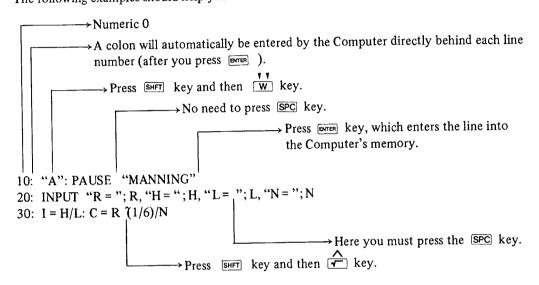

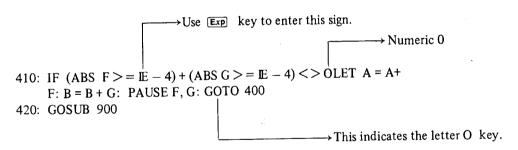

4. After you enter the contents of the program list into the Computer and you execute the program, set the Computer in the DEF mode.

Title **BIORHYTHM**

[Formula]

The idea of biorhythm is that man's physical, emotional and intellectual conditions have a rhythm or cycle, from the very day of his birth.

Physical (P):

a cycle of 23 days

Emotional/Sensitivity (S): a cycle of 28 days

Intellect (I):

a cycle of 33 days

The result of calculation with respect to date on which these conditions are the worst is as follows:

P: 0, 11 or 12

S: 0, 14

I: 0, 16 or 17

Calculation can be made, however, only for date of birth on or after March 1, 1900.

[Example]

To find the biorhythm on 3rd of March, 1977 for one whose date of birth is 4th of February, 1954:

[Operation]

C LOAD ▽11▽

Display: P: AFTER 1.5

(Means the date 1.5 days after the target date (March 3rd) is the

worst day for physical condition.

S: TODAY

(Means the target date is the worst day for emotion/sensitivity.)

I: AFTER 3.5

(Means the date 3.5 days after the target date is the worst for the intellectual condition.)

Input		Display	Note		Input	Display	Note	
TTHE	A	BIRTHDAY?		11			-	
1954	ENTER	?		12				
2	ENTER	?		13			-	
4	ENTER	TARGET?	47	14				
1977	ENTER	?		15				
3	ENTER	?		16			-	
3	ENTER	P AFTER 1.5		17				
	ENTER	S TODAY		18				
	ENTER	I AFTER 3.5		19			<u> </u>	
SHFT	B -			20				

7	it	le вюгнутнм		
	N	Memory content		٦
Α	1	V	·	
В	2	V		İ
C	3	✓	10: "A":INPUT "BIRTHDAY ?",Y,M,D	
D	4	Day	720: GOSUB 500 730: X=N	
Ε	5		40: "B":INPUT "TARGET ?",Y,M,D	
F	6		50: GOSUB 500 60: P=N-X	
G	7		70: AS="P":B=23	
Н	8		80: GOSUB 540 90: AS="S":B=28	
1	9		9100: GOSUB 540	
J	10		110: A\$="I":8=33 120: GOSUB 540	
K	11		130: END	1
L	12		500: IF M-3>=OLET M=M+1:GOTO 520 510: Y=Y-1:M=13+M	
M	13	Month	520: N=INT (365.25*Y)+INT (30.6*M)+D	
N	14	N	530: RETURN 540: C=P-INT (P/B)*B:BEEP 2	
0	15		550: IF C>B/2LET Q=B-C:GOTO 590	
P	16	V	560: IF B/2=CPRINT A\$;" TODAY":RETURN 570: IF C=OPRINT A\$;" TODAY":RETURN	
Q	17	V	580: Q =B/2-C	
R	18		590: PRINT AS;" AFTER"; USING "########"; 0 600: RETURN	
S	19		337	
T	20			İ
U	21			
٧	22		·	
W	23			
X	24	V		I
Y	25	Year		
Z	26			

Title

GUESS-NUMBER GAME

[Formula]

This program lets you guess a number which the Computer generates. The number could be 1 to 4 digits.

When you guess correctly, the Computer beeps 5 times and the display shows "CON-GRATULATION" together with trial number.

When you guess incorrectly, the display shows the following comments.

2 6578 ABBC (In this case, Computer generated 4587 and your guess was 6578) trial No. guess No. comments

A: number and position both are right

B: number is right but position is not rightC: neither number nor position is right

The sequence of the comments (ABBC) does not relate the positions of the number you guessed.

[Operation]

At DEF Mode

N SHFT A When executing this instruction, the Computer generates a 4 digit number. N could be any number.

	Input	Display	Note		Input	Display	Note
	1 2 3 4 5 6			11	ENTER	GUESS NUMBER =	
	SHFT A	GUESS NUMBER GAME		12	2607 ENTER	CONGRATULATION TR	IAL = 5
		GUESS NUMBER =		13	ENTER	GUESS NUMBER =	
	1 2 3 4 ENTER	1 1234 BCCC		14	5678 ENTER	1 5678 ACCC	
	ENTER	GUESS NUMBER =		15		,	
	5 6 7 8 ENTER	2 5678 ABCC		16			
	ENTER	GUESS NUMBER =		17			
	9 0 1 2 ENTER	3 9012 BBCC	·	18)	
	enter	GUESS NUMBER =		19			
)	6072 ENTER	4 6072 BBBB		20			


Т	Title GUESS NUMBER GAME									
	N	lemory content								
A	1		10: C=INT (A/10)							
<u> </u>	+		20: A(B)=A-C*10							
В	2	Index	30: A=C 40: RETURN							
C	3		50: "A":AREAD F:U=0							
D	4	Index	60: E=F:PAUSE "GUESS NUMBER GAME"							
E	5	4 digits random No.	70: L=0:A=E+1234:A=A*\sqrt{A}							
⊢—	 		80: E=INT A-INT (A/E4)*E4:A=E 90: FOR B=16TO 13STEP -1							
F	6	Input data	100: GOSUB 10							
G	7		110: NEXT B							
Н	8	No. of comment A	120: INPUT "GUESS NUMBER =";F							
	Ť		130: IF F>E4BEEP 2:PAUSE "EXCESSIVE INPUT": G0T0 120							
<u> </u>	9	No. of comment B	140: U=F+U:L=L+1							
J	10		/150: A=F:H=0:I=0							
K	11		160: FOR B=20T0 17STEP -1							
L	12	Trail No.	170: GOSUB 10 180: NEXT B							
	₩.		190: FOR B=17TO 20							
M	13	A(13)	200: FOR C=13TO 16							
N	14	(210: A=B-9:IF A(C)=A(B)LET H=H+1:							
0	15	Random No.	C=16							
			220: NEXT C 230: NEXT B							
P	16	A(16)	240: FOR B=17TO 20							
Q	17	A(17) Guess No.	250: C=B-4:A=B-9							
R	18	(260: IF A(C)=A(B)LET I=I+1:H=H-1							
s	19	- 	270: NEXT B _280: IF E=FGOTO 320							
	-		290: V=I*10+H+500:G0SUB V							
Т	20	A(30)	300: PRINT USING "###";L;USING "######";							
U	21	For random No.	F;" .";W\$							
٧	22		310: GOTO 120 320: BEEP 5:PRINT "CONGRATULATION							
			TRIAL=";USING "###";L							
W	23	For judgement	330: E=U+E:GOTO 70							
X	24		340: END							
Y	25		5500: WS="CCCC":RETURN 5501: WS="BCCC":RETURN							
Z	26		² 502: WS="BBCC":RETURN							
	20		503: W\$="BBBC":RETURN							
			7504: W\$="BBBB":RETURN							
			510: WS="ACCC":RETURN							
			511: W\$="ABCC":RETURN 512: W\$="ABBC":RETURN							
	_		513: WS="ABBB":RETURN							
			520: W\$="AACC":RETURN							
			521: W\$="AABC":RETURN							
			522: W\$="AABB":RETURN 530: W\$="AAAC":RETURN							
			:531: WS="AAAB":RETURN							

Title

IMPEDANCE IN A SERIES CIRCUIT

[Formula]

Impedance in a series circuit



$$Z = |\dot{Z}| = \sqrt{R^2 + (\omega L - \frac{1}{\omega C})^2}$$
 (\Omega)

$$\theta = \tan^{-1} \left(\frac{\omega L - \frac{1}{\omega C}}{R} \right)$$
 (°)

$$\dot{Z} = R + j \left(\omega L - \frac{1}{\omega C} \right)$$

[Example]

$$\begin{cases} L = 25 & \text{(mH)} \\ C = 10 & \text{(} \mu\text{F)} \\ R = 5 & \text{(} \Omega \text{)} \\ f = 50 & \text{(Hz)} \end{cases}$$

$$\begin{cases} Z = 310.5 & (\Omega) \\ \theta = -89.08 & (\circ) \\ x = 5 \\ y = -310.5 \\ \vdots & 7 = 5 = 310.5 \end{cases}$$

[Operation]

C LOAD ♥ E 1 ♥ ENTER

	Input	Display	Note		Input	Display	Note
1	SHFT A	L =		11		-	
2	(L)25E-3 ENTER			12			
_	(C)10E-6 ENTER	R =		13			
4	(R)5 ENTER	$\mathbf{F}(\mathbf{HZ}) =$		14			
5	(f)50 ENTER			15			
6		X 5		16		T-1	
7	ENTER	Y −310.455 ···		17			
8	ENTER	Z 310.496 ···		18		·	
9	ENTER	PHASE -89.077 ···	(0)	19			
10				20			

Title IMPEDANCE IN A SERIES CIRCUIT Memory content 1 Α В 2 C 3 C D 4 Ε 5 F f 6 G 7 Н 8 ı V 9 J 10 K 11 L 12 L M 13 Ν 14 0 15 Р 16 Q 17 R 18 S 19 T 20 U 21 ٧ 22 W 23 X 24 Phase Y 25 Ζ 26 \mathbf{Z}

10: "A":DEGREE :INPUT "L=";L 20: INPUT "C=";C 30: INPUT "R=";R 40: INPUT "F(HZ)=";F 50: F=2*π*F 60: L=L*F 70: C=C*F 80: I=L-1/C 90: $Z=\Gamma(R*R+I*I)$ 100: X=ACS (R/Z) 110: IF 0>ILET X=-X 120: USING 130: PRINT "X",R 140: PRINT "Y",I 150: PRINT "Z",Z 160: PRINT "PHASE", X 170: END 172

Title DAYS BETWEEN DATES

[Formula]

This program figures the number of days between two dates. Leap years are taken into account.

[Example]

From 10/5/1976 to 2/20/1977: 138 days From 10/5/1976 to 11/15/1977: 406 days

[Operation]

C LOAD ♥H1♥ [ENTER]

SHFT

Reference year ENTER

Reference month [ENTER]

Reference day ENTER

Appointed year ENTER

Appointed month ENTER

Appointed day ENTER Number of days displayed

ENTER

NOTE: To set a reference date, start operation from [A]

_	Input	Display	Note		Input	Display	Note
1	SHFT	START YEAR=		11			
2	1976 ENTER	MONTH=		12			
3	10 ENTER	DAY=		13			
4	5 ENTER	END YEAR=		14	-		
5	1977 ENTER	MONTH=		15			
6	2 ENTER	DAY=	· · · · · · · · · · · · · · · · · · ·	16			
7	20 ENTER			17			
8		DAYS 138	_	18			
9				19			
10				20			

T	itl	e DAYS BETW	EEN DATES
	N	lemory content	
A	1		
В	2		
C	3		
D	4		10: "A":Y=0
Ε	5		20: INPUT "START YEAR=";R,"MONTH=";S,"DAY="
F	6		30: INPUT "END YEAR=";U,"MONTH=";V,"DAY=";H
G	7	Month for SUB.	40: IF Y=1LET H=R+1925:GOTO 60 50: N=R
Н	8	Year for SUB.	60: G=S:I=T 70: GOSUB 500
	9	Day for SUB.	80: J=I
J	10	No. of days 1	90: IF Y=1LET H=U+1925:GOTO 110
K	11		110: G=V:I=W
L	12		120: GOSUB 500 130: X=I-J
М	13		140: PRINT "DAYS"/X
N	14		150: GOTO 30 500: IF G-3>=OLET Z=-(G-3)*30.65:GOSUB 600
0	15		:I=I-Z:GOTO 530 510: H=H-1
P	16		520: Z=(-(G-3)-12)*30.65:GOSUD 600:I=I-Z
Q	17		530: Z=H*365.25:GOSUB 600:I=I+Z 540: Z=H/100:GOSUB 600:I=I-Z
R	18	Start year	550: Z=H/400:GOSUB 600:I=I+Z
S	19	Start month	560: I=I-307:RETURN 600: X=INT ABS Z:Z=SGN Z*X:RETURN
T	20	Start day	385
U	21	End year	
V	22		•
W	23	End day	
X	24	No. of days wanted	
Y	25		
Z	26	√	
	_		
<u> </u>			
	L		

Title

RANDOM NUMBERS

[Formula]

Generate random numbers according to the congruence method.

$$x_{n+1} = 23 x_n - int \left(\frac{23 x_n}{10^8 + 1} \right) \times (10^8 + 1)$$

 x_0 is an arbitrary 8-digit integer.

[Example]

Clear all memories, and generate ten random numbers with the initial value = 0.

[Operation]

CLOAD $\vee_{B11} \triangledown$ ENTER

Note: Make sure memory X is loaded with no character. If the memory is loaded with a character, an error will occur.

	Input	Display	Note		1			
	mpat	Display	Note		Input	ן ט	isplay	Note
1	THE THE	INITIAL VALUE =		11	ENTER	9.	13784262	
2	O ENTER	NUMBER =		12	ENTER	10.	17038023	
3	10 ENTER	1 10100381		13				
4	ENTER	2 32308761		14				
5	ENTER	3 43101496		15				
6	ENTER	4 91334399		16				
7	ENTER	5 691156		17				
8	ENTER	6 15896588		18				
9	ENTER	7 65621521		19				
10	ENTER	8 9294968		20				

Title RANDOM NUMBERS

	11	ıe	KANDUM	NU
	М	emory	content	
Α	1	i		
В	2	23 x		
C	3			
D	4			
E	5	108+	-1	
F	6			
G	7			
Н	8			
1	9			
J	10			
K	11			
L	12			
M	13			
N	14	n		
0	15			
Р	16			
Q	17			
R	18			
S	19			
T	20			
U	21			
٧	22			
W	23			
X	24			
Y	25			
Z	26			
			*-	

10: "A":INPUT "INITIAL VALUE =";Z

20: INPUT "NUMBER=";N

30: X=ABS (439147+X+Z)

40: E=**E**8+1

50: FOR A=1TO N

60: B=23*X

70: X=B-INT (B/E)*E

80: BEEP 2:PRINT A.X

90: NEXT A

100: END

Title

NORMAL DISTRIBUTION AND PERCENTILE

[Formula]

Determine the normal distribution function $\phi(x)$ and its inverse function (percentile) according to Hasting's best approximate equation.

• $\phi(x)$

Suppose,

$$\phi(x) = \int_{-\infty}^{t} \phi_t \, \mathrm{d} x$$

$$\phi t = \frac{1}{\sqrt{2\pi}} e^{-\frac{x^2}{2}}$$

$$t = \frac{1}{1 + px}$$

we obtain,

$$\phi(x) = 1 - \phi_t (c_1 t + c_2 t^2 + c_3 t^3 + c_4 t^4 + c_5 t^5)$$

$$P = 0.2316419$$

$$c_1 = 0.31938153$$

$$c_2 = -0.356563782$$

$$c_3 = 1.78147937$$


$$c_4 = -1.821255978$$

$$c_5 = 1.330274429$$

• Percentile

$$x = \sqrt{\ln Q^{-2}}$$

$$t Q = x - \frac{c_0 + c_1 x + c_2 x^2}{1 + d_1 x + d_2 x^2 + d_3 x^3}$$



$$c_0 = 2.515517$$

$$d_1 = 1.432788$$

$$c_1 = 0.802853$$

$$d_2 = 0.189269$$

$$c_2 = 0.010328$$

$$d_3 = 0.00138$$

[Example]

[Operation]

CLOAD ♥B3♥ ENTER

	Input	Display	Note		Input	Display	Note
1	2 SHFT A	P 9.77249 E-01	$\phi(x)$	11			
2				12			
3				13			
4	0.05 SHFT B	TQ 1.645361125	t Q	14		VEILE	
5				15		·	-
6				16			
7				17			
8				18			
9				19			
10				20			

Title NORMAL DISTRIBUTION AND PERCENTILE Memory content 1 Α В 2 C 3 10: "A": AREAD Z 20: Y=1/(1+.2316419*Z) D 4 30: A=.31938153:B=-.356563782 Ε 5 40: C=1.78147937:D=1.330274429 50: E=-1.821255978 F 6 60: F=C+Y*(D*Y+E):P=1-EXP (-.5*Z*Z)/√(2*\(\))* G 7 Y*(A+Y*(B+Y*F)) 70: BEEP 2:PRINT "P",P Н 8 80: END i 9 90: "B": AREAD Z 100: Y=JLN (1/Z/Z) J 10 110: A=2.515517:B=.802853:C=.010328 K 11 120: D=1.432788:E=.189269:F=.00138 130: Q=Y-(A+Y*(B+C*Y))/(1+Y*(D+Y*(E+F*Y))) L 12 140: BEEP 2:PRINT "TQ",Q M 13 150: END 319 N 14 15 Р 16 Þ Q 17 T_{Q} R 18 S 19 T 20 U 21 V 22 W 23 X 24 Υ 25 working area Z 26 Input area

YOUR OWN PROGRAM

Title	Í

	Input	Display	Note		Input	Display	Note
1				11			
2				12			
3				13			
4				14			
5				15			
6				16			
7				17			
8				18			
9				19			
0				20			

T	Title						
	Memory content	Line numbe	Statements				
Α	1						
В	2						
С	3						
D	4						
E	5						
F	6						
G	7						
Н	8						
1	9						
J	10						
K	11						
L	12						
M	13						
N	14						
0	15						
Р	16						
Q	17						
	18						
	19						
	20						
	21						
	22	·					
W							
	24						
	25						
Z	26						
\dashv							
_							
_							
\bot							

YOUR OWN PROGRAM							
Title	,						
						į	
Input	Display	Note		Input	Display	Note	
			11			7.000	
			12				
			14				
			15				
		-	16		· · · · · · · · · · · · · · · · · · ·		
			18				
			19				
			20 117				

T	Title						
	Memory content	Line number	Statements				
Α	1						
В	2						
C	3						
D	4						
E	5						
F	6						
G	7						
H	8						
	9						
	10						
-	11						
L	12						
	13						
N	 						
<u> </u>	15						
P	16						
Q							
R							
S							
U							
V							
W							
	24						
Y	25						
Z	26						

INDEX

Α		age	
	Absolute Value (ABS)	22	
	Addition and Subtraction	10	
	Angle Conversions (DMS, DEG)	22	
	Angular Symbol		
	Appendix	87	
	AREAD Statement	69	
	Arithmetic Calculation	12	
	Arithmetic Operator		
В		••	
	Battery Indicator	16	
	Battery Replacement		
	BEEP Statement		
С			
	Calculations with Parentheses	20	
	CHAIN Statement	76	
	Character Variable	45	
	Checking Reserve Programs		
	Checking Stored Programs		
	Checking the Program (after CLOAD1)	98	
	CLEAR Statement	68	
	CLOAD Statement		
	CLOAD? Statement	75	
	CLOAD1 Statement		26
	Command Statement		'• a
	Computation Range		
	Configuration of Reserve Programs		
	Connecting the Cassette Interface		
	Connecting the Cassette Interface to a Tape Recorder		
	Connecting the Pocket Competer to the Cassette Interface		
	CONT Command		
	Correction of Reserve Programs		
	CSAVE Statement		
	Cursor		
_	Cursor positioning	. 20	
D		71	
	DEBUG Command	. / 1	
	Debugging Programs		
	Definable Mode (DEF)		
	Defined Program		
	DEGREE Statement		
	Deleting Lines		
	Display		
	Display System		
	Display System	. 10	

E	
Editing Porgrams on Magnetic Tape Editing Expressions END Statement. Error Codes Executing Programs Execution of the Program (after CLOAD1) Exponential Function (EXP)	26 68 85
F Features Fixed Memory Flexible Memory Flow Chart. FOR Statement. Functions Functions of Keys	
GOTO Statement	
IF Statement Indirect Designation. INPUT # INPUT Statement Inputting Data Inputting to Variables Inserting Lines Integer (INT) Introduction. Inverse Trigonometric Functions (ASN, ACS, ATN). J	47 79 52 17 48 38
K Keyboard L Label LET Statement. Levels of Pending Operation Line. Line Number Line Number LIST Command Logarithmic functions (LN LOG) Loading from the Magnetic Tape Logic Functions	35 51 29 35 35 72 22
Logic Operator . M Manual Calculations. MEM Command . Memory Calculations . Mode . Mode Symbol .	18 73 25

	Name Label	14
	NEW Command	
	NEXT Statement	
	Number of input Characters	16
	Numerical Variable	
_		
O		0.2
	Operating the Cassette interfece and recorder	93
	Organization of Program Memory	36
Р		
	Partial correction	
	PAUSE Statement	
	Power Calculations	
	PRINT # Statement	
	PRINT Statement	
	Priority of Calculations	29
	Program Correction	37
	Programmed Calculations	31
	Program mode (PRO)	13
	Program Memory	47
	Program Statement	., 51
	Prompt Symbol	1/1
	Program Verification	04
_		94
Q		
R		
	RADIAN Statement	69
	Rapid Debugging	41
	Recall Functions	26
	Recalling the Contents of Variables	49
	Recording onto Magnetic Tape	93
	REM Statement	70
	Reservable Keys	80
	Reserve Memory for Reservable Keys	80
	Reserve Program Mode (RESERVE)	13
	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	
	RETURN Statement	62
	RETURN Statement	62
	RUN Command	62 70
c	RUN Command	62 70
s	RUN Command	62 70 13
S	RUN Command	62 70 13
s	RUN Command	62 70 13 21 13
S	RUN Command	62 70 13 21 13 16
S	RUN Command	62 70 13 21 13 16 23
S	RUN Command	62 70 13 21 13 16 23 88
S	RUN Command	62 70 13 21 13 16 23 88 46
S	RUN Command	62 70 13 21 13 16 23 88 46 22
S	RUN Command RUN Mode (RUN). Scientific Functions. Second Functions Shift Symbol Sign Function (SGN) Specifications. Specifying Variables. Square Roots Statement	62 70 13 21 13 16 23 88 46 22 4
S	RUN Command	62 70 13 21 13 16 23 88 46 22 4 74
S	RUN Command RUN Mode (RUN). Scientific Functions. Second Functions Shift Symbol Sign Function (SGN) Specifications. Specifying Variables. Square Roots Statement	62 70 13 21 13 16 23 88 46 22 4 74 35

T	98
	Table of Error Codes
	Table of Functions and Statements
	Tape Notes
U	
-	USING Statement
٧	
	Variables
W	
	Writing Programs 34
Х	
Υ	
Z	

i. In

LIMITED WARRANTY

For a period of 90 days from the date of delivery, Radio Shack warrants to the original purchaser that the computer hardware described herein shall be free from defects in material and workmanship under normal use and service. This warranty is only applicable to purchases from Radio Shack company-owned retail outlets and through duly authorized franchisees and dealers. The warranty shall be void if this unit's case or cabinet is opened or if the unit is altered or modified. During this period, if a defect should occur, the product must be returned to a Radio Shack store or dealer for repair, and proof of purchase must be presented. Purchaser's sole and exclusive remedy in the event of defect is expressly limited to the correction of the defect by adjustment, repair or replacement at Radio Shack's election and sole expense, except there shall be no obligation to replace or repair items which by their nature are expendable. No representation or other affirmation of fact, including, but not limited to, statements regarding capacity, suitability for use, or performance of the equipment, shall be or be deemed to be a warranty or representation by Radio Shack, for any purpose, nor give rise to any liability or obligation of Radio Shack whatsoever.

EXCEPT AS SPECIFICALLY PROVIDED IN THIS AGREEMENT, THERE ARE NO OTHER WARRANTIES, EXPRESS OR IMPLIED. INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRAN-TIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND IN NO EVENT SHALL RADIO SHACK BE LIABLE FOR LOSS OF PROFITS OR BENEFITS, INDIRECT, SPECIAL, CONSEQUENTIAL OR OTHER SIMILAR DAMAGES ARISING OUT OF ANY BREACH OF THIS WARRANTY OR OTHERWISE.

RADIO SHACK

A DIVISION OF TANDY CORPORATION

THE THE

U.S.A.: FORT WORTH, TEXAS 76102 CANADA: BARRIE, ONTARIO L4M 4W5

TANDY CORPORATION

AUSTRALIA

BELGIUM

U.K.

280-316 VICTORIA ROAD RYDALMERE, N.S.W. 2116 PARC INDUSTRIEL DE NANINNE 5140 NANINNE

BILSTON ROAD WEDNESBURY WEST MIDLANDS WS10 7JN